2018 PRODUCT CATALOG

Sim

ger

0

Mat Battery

CONTENTS

..................

.......................

.........

STINGER	Х	3
QUICK REFERENCE	GUIDE	.4

<3 SERIES	6
<pre><2 SERIES</pre>	8
<1 SERIES	10

12

STINGER

	IG KITS	10
VVIRIIN	6000 SERIES	
	4000 SERIES	
	QUICK REFERENCE GUIDE	10
	SPECIALTY VEHICLES	
	TOTAL PROFIT SYSTEM	
WIRE.		
	POWER WIRE	
	SPEAKER WIRE	
	PRIMARY WIRE	
INTER	CONNECTS	34
- OLIVE	9000 SERIES	35
~	8000 SERIES	
	6000 SERIES	
	4000 SERIES	38
	1000 SERIES	
	MARINE/ADVENTURE SERIES	40
ROAD	KILL SOUND DAMPING	42
	ULTIMATE	
	EXPERT	45
	STEALTH/OVERKILL/KITS	46
	WAVE RINGS/FAST RINGS	
BATTE	WAVE RINGS/FAST RINGS	48
	POWER ² SERIES.	50
	POWER SERIES	
	SPECIALTY VEHICLES	
	CHARGERS/POWER SUPPLY	
	CAPACITORS	
	TERMINALS	
INISTA	LLATION ACCESSORIES	
1110171	ISOLATORS/RELAYS/TERMINALS	
	WIRE MANAGEMENT	
	FUSES / FUSE MANAGEMENT	62
	POWER INVERTERS FANS / SIGNAL ADAPTERS	
	TEXTILES.	

STINGER SELECT......68

INTERCONNECTS	69
WIRING KITS	71
WIRE	
POWER WIRE SPEAKER WIRE	73 71
PRIMARY WIRE	75
BATTERIES/CAPACITORS/TERMINALS	76
FUSES / FUSE MANAGEMENT	77
ENCLOSURES	79

SPECIALTY......80

V-TWIN	82
MARINE	86
POWER SPORTS	92

MERCHANDISING...98



Stinger X was developed for the professional installer and premier Stinger partners. MAP (minimum advertised price) protection ensures that the retail price you set won't be challenged by your customers, because they won't find it online or anywhere else cheaper. Allowing you to install with trusted accessories, while preserving your margin.



	PART NUMBER	CHANNELS	LENGTH	TYPE
	XI3220	2	20′/6.1m	Audio Interconnect
	XI3217	2	17′/5.2m	Audio Interconnect
	XI3212	2	12′/3.7m	Audio Interconnect
	XI326	2	6′/1.8m	Audio Interconnect
X3	XI323	2	3′/0.9m	Audio Interconnect
Series	XI32YM	2	2YM	Audio Interconnect
	XI32YF	2	2YF	Audio Interconnect
	XI3417	4	17′/5.2m	Audio Interconnect
	XI2220	2	20′/6.1m	Audio Interconnect
	XI2217	2	17′/5.2m	Audio Interconnect
	XI2212	2	12′/3.7m	Audio Interconnect
	XI226	2	6′/1.8m	Audio Interconnect
	XI223	2	3′/0.9m	Audio Interconnect
	XI221.5	2	1.5′/0.5m	Audio Interconnect
	XI22YM	2	2YM	Audio Interconnect
	XI22YF	2	2YF	Audio Interconnect
	XI2420	4	20′/6.1m	Audio Interconnect
X2	XI2417	4	17′/5.2m	Audio Interconnect
Series	XI2412	4	12'/3.7m	Audio Interconnect
	XI269	6	9′/2.7m	Audio Interconnect
	XI2617	6	17′/5.2m	Audio Interconnect
	XI1117		17′/5.2m	Toslink Interconnect
	XI116		6′/1.8m	Toslink Interconnect
	XI113		3′/0.9m	Toslink Interconnect
	XI1220	2	20′/6.1m	Audio Interconnect
	XI1217	2	17′/5.2m	Audio Interconnect
	XI1212	2	12′/3.7m	Audio Interconnect
	XI126	2	6′/1.8m	Audio Interconnect
	XI123	2	3′/0.9m	Audio Interconnect
	XI121.5	2	1.5′/0.5m	Audio Interconnect
	XI12YM	2	2YM	Audio Interconnect
	XI12YF	2	2YF	Audio Interconnect
	XI1420	4	20′/6.1m	Audio Interconnect
	XI1417	4	17′/5.2m	Audio Interconnect
X1	XI1617	6	17'/5.2m	Audio Interconnect
	XI1820		20′/6.1m	Video Interconnect
Series	XI1812		12′/3.7m	Video Interconnect
	XI136	2	6'	Audio Interconnect
	XI2LINE	2	8″/0.2m	RCA LINE INPUTS (BULK PAIRS)

X3 SERIES



C3 Tech

Continuous Connection Construction (C3 Tech) provides unmatched signal transfer



Signal Flow

Dynamic Signal Flow uses finely stranded silver-plated, pure OFC copper to optimize signal vs. frequency interaction for a dynamic listening experience



Lock Tip's rotational locking end with Quad-Clamp-Precision 4-cut RCA provides the ultimate in locking and clamping force with unsurpassed connection

Lock Tip RCA Connectors integrity



I.D. Interference

Defense

I.D. Interference Defense doubles the shielding efforts by combining two layers of EMI rejecting Mylar foil and radiated noise absorbing copper mesh, eliminating unwanted noise and interference



Noise Shield

Directional Construction Noise shield directional construction uses 3 tightly twisted conductor bundles (+, -, signal drain) per channel to create a directional noise cancelling architecture



Body Armor Protection utilizes high strength nylon fibers that are woven tightly around the ultra flexible PVC cable integrity when contending with sharp metal, vibration, and moisture

Body Armor








X3 Series Lineup AUDIO INTERCONNECTS

XI3220: 2 Channels, Length: 20Ft/6.1m
XI3217: 2 Channels, Length: 17Ft/5.2m
XI3212: 2 Channels, Length: 12Ft/3.7m
XI326: 2 Channels, Length: 6Ft/1.8m
XI323: 2 Channels, Length: 3Ft/0.9m
XI32YM: 2 Channels, Y- 2 Male, 1 Female
XI32YF: 2 Channels, Y- 2 Female 1 Male
XI3417: 4 Channels, Length: 17Ft/5.2m



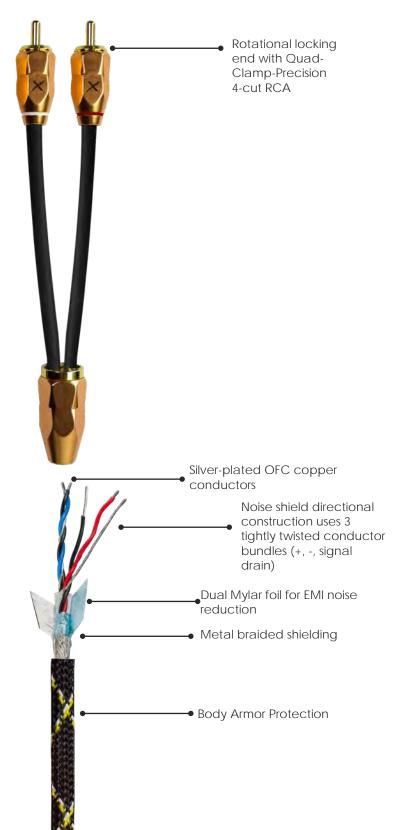

X2 SERIES



Continuous Connection Construction (C3 Tech) provides unmatched signal transfer



Dynamic Signal Flow uses finely stranded pure OFC copper to optimize signal vs. frequency interaction for a dynamic listening experience



Quad-Clamp's machined 4-cut RCA connector allows for maximum clamping force and connection integrity



I.D. Interference Defense doubles the shielding efforts by combining two layers of EMI rejecting Mylar foil eliminating unwanted noise



Noise shield directional construction uses 3 tightly twisted conductor bundles (+, -, signal drain) per channel to create a directional noise cancelling architecture




and interference





X2 Series Lineup AUDIO INTERCONNECTS

- XI2220: 2 Channels, Length: 20Ft/6.1m
- XI2217: 2 Channels, Length: 17Ft/5.2m
- XI2212: 2 Channels, Length: 12Ft/3.7m
- XI226: 2 Channels, Length: 6Ft/1.8m
- XI223: 2 Channels, Length: 3Ft/0.9m
- XI221.5: 2 Channels, Length: 1.5Ft/0.5m
- XI22YM: 2 Channels, Y- 2 Male, 1 Female
- XI22YF: 2 Channels, Y-1 Male, 2 Female
- XI2420: 4 Channels, Length: 20Ft/6.1m
- XI2417: 4 Channels, Length: 17Ft/5.2m
- XI2412: 4 Channels, Length: 12Ft/3.7m
- XI269: 6 Channels, Length: 9Ft/2.7m
- XI2617: 6 Channels, Length: 17Ft/5.2m

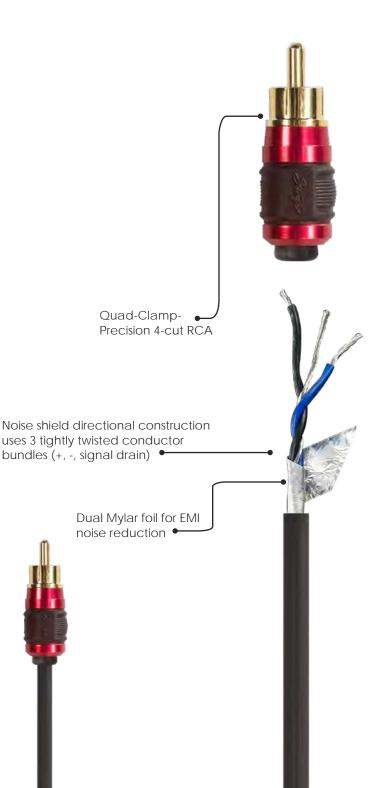

X1SERIES



Continuous Connection Construction (C3 Tech) provides unmatched signal transfer



Dynamic Signal Flow uses finely stranded pure OFC copper to optimize signal vs. frequency interaction for a dynamic listening experience



Construction

Noise shield directional construction uses 3 tightly twisted conductor bundles (+, -, signal drain) per channel to create a directional noise cancelling architecture





X1 Series Lineup AUDIO INTERCONNECTS

XI1220: 2 Channels, Length: 20Ft/6.1m XI1217: 2 Channels, Length: 17Ft/5.2m XI1212: 2 Channels, Length: 12Ft/3.7m XI126: 2 Channels, Length: 6Ft/1.8m XI123: 2 Channels, Length: 3Ft/0.9m XI121.5: 2 Channels, Length: 1.5Ft/0.5m XI12YM: 2 Channels, Length: 1.5Ft/0.5m XI12YF: 2 Channels, Y- 2 Male, 1 Female XI12YF: 2 Channels, Y- 2 Female 1 Male XI1420: 4 Channels, Length: 20Ft/6.1m XI1417: 4 Channels, Length: 17Ft/5.2m XI1617: 6 Channels, Length: 17Ft/5.2m

3.5mm

XI136: 2 Channels, Length: 6Ft/1.8m, 3.5mm, 3.5mm

VIDEO INTERCONNECTS

XI1820: Video Interconnect Shielded 75 Ohm, Length: 20Ft/6.1m **XI1812:** Video Interconnect Shielded 75 Ohm, Length: 12Ft/3.7m



XI1117: Fiber Optic Cable with TosLink Connectors, Length: 17Ft/5.2m XI116: Fiber Optic Cable with TosLink Connectors, Length: 6Ft/1.8m XI113: Fiber Optic Cable with TosLink Connectors, 3Ft/0.9m

LINE LEVEL to RCA

XI2LINE: Line Level to RCA, Sold in Bulk Pairs Length: 8in/0.2m

HIGH PERFORMANCE

The core line of Stinger offers audiophiles the accessories they demand to build the high performance systems they live for. A focus on quality, Stinger is designed and engineered to achieve the highest performance from audio components, for precision sound reproduction no matter where the road takes you.

Our merchandising and dealer programs are developed to not only give your stores the products you desire, but also the profit you need to be successful.

THE STINGER LINEUP

- Wiring Kits
- Wire

Singer

- Interconnects
- RoadKill Sound Damping
- Batteries
- Installation Accessories

WIRING KITS 6000 SERIES

6000 SERIES WIRING KITS FEATURING UPGRADED FUSE HOLDER AND FEATURING A PROTECTIVE WIRE MESH COVERING ON INCLUDED POWER WIRE

Available in Power and Complete (power + signal) Kits, Stinger's 6000 Series Wiring kits have all the essentials for a professional installation. Featuring 100% oxygen-free tinned copper for a pure, uninterrupted transfer of power. Tru-spec cables/wires meet or exceed the industry standard of copper required for the gauge size.

SK6201 1/0GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 4000 WATTS OR 300 AMPS



Kit Includes:

- ▶18ft./5.5m Matte Blue Hyper-Twist 1/0GA Power Wire
- ▶3ft./0.9m Matte Clear Hyper-Twist 1/0GA Ground Wire
- ▶17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- SHD201 Water-Resistant ANL Fuse Holder
- ▶300 Amp Shoc-Krome ANL Fuse
- ▶1/0GA Crimp Ring Terminals Pre-Installed
- Stinger Metal Installation Badge
- ▶16GA Blue Butt Connector
- ▶1/0GA Snap In Protective Firewall Grommet
- ► Self-Drilling Mounting Screws
- ▶(10) 7"/17.8cm Wire Ties

SK6241 4GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 1750 WATTS OR 175 AMPS



- ▶ 18ft./5.5m Matte Blue Hyper-Twist 4GA Power Wire
- ▶ 3ft./0.9m Matte Clear Hyper-Twist 4GA Ground Wire
- ▶17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- SHD801 Water-Resistant Mini-ANL (MIDI) Fuse Holder
- ▶ 175 Amp Shoc-Krome Mini-ANL (MIDI) Fuse
- ▶4GA Crimp Ring Terminals Pre-Installed
- Stinger Metal Installation Badge
- ▶16GA Blue Butt Connector
- ▶4GA Snap In Protective Firewall Grommet
- Self-Drilling Mounting Screws
- ▶(10) 7″/17.8cm Wire Ties

WIRING KITS 6000 SERIES

SK6281 8GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 800 WATTS OR 70 AMPS



Kit Includes:

- ▶ 18ft./5.5m Matte Blue Hyper-Twist 8GA Power Wire
- ▶3ft./0.9m Matte Clear Hyper-Twist 8GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- SHD801 Water-Resistant Mini-ANL (MIDI) Fuse Holder
- ▶ 70 Amp Shoc-Krome Mini-ANL (MIDI) Fuse
- ▶8GA Crimp Ring Terminals Pre-Installed
- Stinger Metal Installation Badge
- ▶16GA Blue Butt Connector

COMPLETE KITS: POWER + SIGNAL

SK6641 4GA Complete Wiring Kit DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 1750 WATTS OR 175 AMPS



- ▶ 18ft./5.5m Matte Blue Hyper-Twist 4GA Power Wire
- ▶ 3ft./0.9m Matte Clear Hyper-Twist 4GA Ground Wire
- ▶17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶(1) 17ft./5.2m 6000 Series 2-Channel Audio Interconnect (SI6217)
- ▶ 30ft./9.1m Matte Blue Hyper-Twist 16 Gauge Speaker Wire
- SHD801 Water-Resistant Mini-ANL (MIDI) Fuse Holder
- ▶ 175 Amp Shoc-Krome Mini-ANL (MIDI) Fuse
- ▶4GA Crimp Ring Terminals Pre-Installed
- Stinger Metal Installation Badge
- ▶16GA Blue Butt Connector
- ▶4GA Snap In Protective Firewall Grommet
- Self-Drilling Mounting Screws
- ▶(10) 7″/17.8cm Wire Ties

WIRING KITS 6000 SERIES

SK6681 8GA Complete Wiring Kit DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 800 WATTS OR 70 AMPS



- ▶ 18ft./5.5m Matte Blue Hyper-Twist 8GA Power Wire
- ▶3ft./0.9m Matte Clear Hyper-Twist 8GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- ▶ (1) 17ft./5.2m 6000 Series 2-Channel Audio Interconnect (SI6217)
- SHD801 Water-Resistant Mini-ANL (MIDI) Fuse Holder
- ▶ 70 Amp Shoc-Krome Mini-ANL (MIDI) Fuse
- ▶8GA Crimp Ring Terminals Pre-Installed
- Stinger Metal Installation Badge
- ► 16GA Blue Butt Connector
- ▶8GA Snap In Protective Firewall Grommet
- Self-Drilling Mounting Screws
- ▶(10) 7″/17.8cm Wire Ties

WIRING KITS 4000 SERIES

4000 SERIES WIRING KITS

Available in Power and Complete (power + signal) Kits, Stinger's 4000 Series Wiring kits have all the essentials for a professional installation. Featuring 100% oxygen-free tinned copper for a pure uninterrupted transfer of power. Tru-spec cables/wires meet or exceed the industry standard of copper required for the gauge size.

SK4201 1/0GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 3400 WATTS OR 250 AMPS



Kit Includes:

- ▶18ft./5.5m Matte Red Hyper-Twist 1/0GA Power Wire
- ▶ 3ft./0.9m Matte Black Hyper-Twist 1/0GA Ground Wire
- ▶17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- SPD5201 ANL Fuse Holder
- ▶250 Amp Shoc-Krome ANL Fuse
- ▶ 1/0GA Crimp Ring Terminals Pre-Installed
- ▶16GA Blue Butt Connector
- 1/0GA Snap In Protective Firewall Grommet
- Self-Drilling Mounting Screws
- ▶(10) 7″/17.8cm Wire Ties

SK4241 4GA Power Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 1500 WATTS OR 150 AMPS



- ▶ 18ft./5.5m Matte Red Hyper-Twist 4GA Power Wire
- ▶ 3ft./0.9m Matte Black Hyper-Twist 4GA Ground Wire
- ▶ 17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- SPD5801 mini-ANL (MIDI) Fuse Holder
- ▶150 Amp Shoc-Krome MIDI Fuse
- ▶4GA Crimp Ring Terminals Pre-Installed
- ▶16GA Blue Butt Connector
- ▶4GA Snap In Protective Firewall Grommet
- Self-Drilling Mounting Screws
- ▶(10) 7″/17.8cm Wire Ties

WIRING KITS 4000 SERIES



COMPLETE KITS: POWER + SIGNAL

SK4641 4GA Complete Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 1500 WATTS OR150 AMPS



- ▶ 18ft./5.5m Matte Red Hyper-Twist 4GA Power Wire
- ▶ 3ft./0.9m Matte Black Hyper-Twist 4GA Ground Wire
- (1) 17ft./5.2m 4000 Series 2-Channel Audio Interconnect (SI4217)
- ▶17ft./5.2m Matte Blue 18GA Remote Turn-On Wire
- SPD5801 mini-ANL (MIDI) Fuse Holder
- ▶150 Amp Shoc-Krome MIDI Fuse
- ▶4GA Crimp Ring Terminals Pre-Installed
- ▶16GA Blue Butt Connector
- ▶4GA Snap In Protective Firewall Grommet
- ► Self-Drilling Mounting Screws
- ▶(10) 7"/17.8cm Wire Ties

WIRING KITS 4000 SERIES

SK4681 8GA Complete Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 600 WATTS OR 60 AMPS



Kit Includes:

- ▶18ft./5.5m Matte Red Hyper-Twist 8GA Power Wire
- ▶3ft./0.9m Matte Black Hyper-Twist 8GA Ground Wire
- (1) 17ft./5.2m 4000 Series 2-Channel Audio Interconnect (SI4217)
- ▶17ft./5.2m Matte Blue 18Ga Remote Turn-On Wire
- SPD5101 AGU Fuse Holder
- 60 Amp AGU Fuse
- ▶8GA Crimp Ring Terminals Pre-Installed
- ▶16GA Blue Butt Connector
- ▶8GA Snap In Protective Firewall Grommet
- ► Self-Drilling Mounting Screws
- ▶(10) 7"/17.8cm Wire Ties

SK46101 10GA Complete Wiring Kit

DESIGNED SPECIFICALLY FOR CAR AUDIO SYSTEMS UP TO 300 WATTS OR 30 AMPS



- ▶ 18ft./5.5m Matte Red Hyper-Twist 10GA Power Wire
- ▶ 3ft./0.9m Matte Black Hyper-Twist 10GA Ground Wire
- (1) 17ft./5.2m 4000 Series 2-Channel Audio Interconnect (\$I4217)
- ▶ 17ft./5.2m Matte Blue 18Ga Remote Turn-On Wire
- ► Water-Resistant ATC Fuse Holder
- 30 Amp ATC Fuse
- ▶ 10GA Crimp Ring Terminals Pre-Installed
- ▶16GA Blue Butt Connector
- 10GA Snap In Protective Firewall Grommet
- Self-Drilling Mounting Screws
- ▶(10) 7″/17.8cm Wire Ties

WIRING KITS QUICK REFERENCE GUIDE

Stinger's modular planogram programs make it easy to select the products you need, and outfit your store. We offer smaller building block packages, and then full walls. All planogram options are detailed in the merchandising section of this catalog.

PLANOGRAM 6000 SERIES

S1768184 20" X 30" Includes: 1: SK6201 2 Each: SK6641, SK6681, SK6281

PLANOGRAM 4000 SERIES

S1795984 20" X 30" Includes: Includes: 1: SK4201 2 Each: SK4201, SK4641, SK4681, SK4281



	PART NUMBER	PRODUCT
	SK6201	1/0 GA Power Wiring Kit
	SK6641	4 GA Complete Wiring Kit
	SK6241	4 GA Power Wiring Kit
6000	SK6681	8 GA Complete Wiring Kit
SERIES	SK6281	8 GA Power Wiring Kit
	SK4201	1/0 GA Power Wiring Kit
	SK4641	4 GA Complete Wiring Kit
	SK4241	4 GA Power Wiring Kit
	SK4681	8 GA Complete Wiring Kit
4000	SK4281	8 GA Power Wiring Kit
SERIES	SK46101	10 GA Complete Wiring Kit

WIRING KITS SPECIALTY

MARINE COMPLETE AMPLIFIER INSTALLATION KIT

- Power Wiring Kit utilizing Marine grade jacket. True Copper for current transfer and tinned conductors for reliability in the harsh marine environment
- Industry first Siamese Pair dual power and ground wire
- ► High Strand Count OFC Hyper-Twist Tinned Conductors
- Highest Marine Grade Type III BC5W2 Compliant Marine PVC Jacket,1050C Dry, 750C wet, Salt, Fog, Oil, Water resistant Exceeds UL1426 Marine Standards
- Element resistant MIDI fuse holder



SEA4283 - 8GA 3 meter / 9.8 feet / 80 amp MIDI fuse





SPXRZR4242 UNIVERSAL 2/4 CHANNEL AMP INSTALLATION KIT FOR OFF-ROAD VEHICLES Plug-and-Play for 2014+ Polaris RZR

Plug-and-Play for 2014+ Polaris RZR
Kit Includes under dash amplifier mounting bracket
Pre-cut and loomed power/ ground & speaker wire harnesses
Fusing and pre-terminated wiring
Compatible with 2-seat and 4-seat models
4GA into dual 8GA power / ground wire
16GA speaker wire
150 amp MIDI fuse

WIRING KITS SPECIALTY

SVTK4681 HARLEY-DAVIDSON 2/4 CHANNEL UNIVERSAL AMPLIFIER WIRING KIT

Plug-and-Play for 1998+ Harley-Davidson Touring Motorcycles

- Pre-cut and loomed power/ ground & speaker wire harnesses
- Direct fit wiring and fusing with pre-terminated ends with Ferrule connectors
- Includes OEM connections for interfacing with 1998 and up models
- Works on Street/Electra Glide and Road Glide models
- ▶ 8GA OFC power and ground
- ▶ 16GA speaker wire
- ▶ 60 amp MAXI fuse





MADE FOR HARLEY-DAVIDSON



TOTAL PROFIT SYSTEM (TPS)

Stinger's Total Profit System (TPS) helps dealers increase profit, lower costs, and provide customers with a high quality installation solution.

What is TPS?

Stinger's TPS gives you the ability to sell and merchandise kits to your customers while taking advantage of bulk speaker wire, power cable purchasing, delivering increased profit for you and eliminating waste. Additionally, you gain valuable real estate on your showroom floor. The three TPS kits take up less room on your product wall, allowing room for additional product showcasing. The TPS Install Kits come with everything needed for installs, minus the speaker wire, power cable, and interconnects. The hardware, remote lead, and accessories are together in streamlined a package, along with a remote turn-on wire. Rolled speaker wire is used instead of

pre-cut lengths.

The Stinger power cable and interconnects are sold separately.

How TPS Works

Customers pay the same amount for the TPS Install Kits as they would for the wiring kit. Installers cut only the wire they need. Dealers have more display room and need fewer SKUs and less inventory.

Why? Wasted wire is money thrown away.

Dealers can increase profit by up to 42% just by reducing this waste.

Increase Your Profit

When you purchase a TPS system, you not only get the product, you get the series-specific, personalized signage with your custom pricing. This provides your customer and sales staff easy reference to the cost, including amplifier installation accessories and labor.

Impact Your Customers

Display your custom pricing signage near the amplifiers or soundboard. This helps customers understand the connection between the two and guides them to the TPS display. Choosing the Stinger TPS Install Kit becomes the natural choice.

TPS PLANOGRAM







SK101

1/0GA INSTALL KIT UP TO

- 4000 WATTS OR 300 AMPS:
- · SHD201 water-resistant ANL fuse holder
- · 300 amp Shoc-Krome ANL fuse
- · 17ft. matte blue 18GA remote turn-on wire
- · 1/0GA crimp ring terminals
- · Blue, red, black boots to match power wire
- · 18GA fork terminal
- · 16GA blue butt connector
- · 1/0GA snap in protective firewall grommet
- \cdot Self-drilling mounting screws
- · (10) 7" wire ties



SK141

4GA INSTALL KIT UP TO

- 1000 WATTS OR 100 AMPS:
- · SPD5801 waterproof mini-ANL (MIDI) fuse holder
- · 100 amp Shoc-Krome mini-ANL (MIDI) fuse
- · 17ft. matte blue 18GA remote turn-on wire
- · 4GA crimp ring terminals
- Blue, red, black boots to match power wire · 18GA fork terminal
- · 16GA blue butt connector
- ·4GA snap in protective firewall grommet
- · Self-drilling mounting screws
- \cdot (10) 7" wire ties



SK181

8GA INSTALL KIT UP TO

- 800 WATTS OR 70 AMPS: SPD5801 waterproof mini-ANL (MIDI) fuse holder
- 70 amp Shoc-Krome mini-ANL (MIDI) fuse
- 17ft. matte blue 18GA remote turn-on wire
- · 8GA crimp ring terminals
- Blue, red, black boots to match power wire · 18GA fork terminal
- · 16GA blue butt connector
- ·8GA snap in protective firewall grommet
- Self-drilling mounting screws
 - (10) 7" wire ties

Personalize Your Own Signage (12" W x 18" H Signage Included with Purchase)

Visit:

http://services.aampglobal.com/ web/dealers/TPS/AIPOrder.html

Fill out your pricing information, and your personalized signage will arrive in approximately 15 days.








WIRE: MERCHANDISING



Stinger's modular planogram programs simplify the ordering process. See the Merchandising section for detailed merchandising kits and planogram solutions.



Standing Wire Rack with Locking Wheels 52" H x 24" W x 21" D SGM1N Slatwall Wire Rack 7" H x 22.5" W x 14" D RUE-SPEC Stinger's power and speaker wire is made of True-Spec, tinned, oxygen-free copper for oxidation prevention, making Stinger one of the best conductors available. Our wire boasts Hyper-Twist construction, creating a dense yet incredibly flexible wire that is easy to install and provides outstanding performance

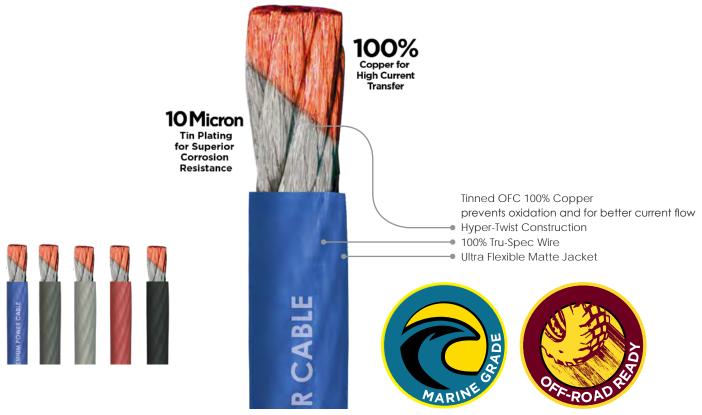

Why Stinger Only Uses OFC Copper

	100% Copper														
					CO	PPER WI	re ampe	RAGE in	Feet						
		10	20	30	40	50	60	75	100	150	200	350	500	750	1000
	000							95	72	48	36	22	15	10	8
	1/0							61	45	30	23	15	9		
GAUGE	3				57	45	38	29	20	15	12	7			
	4			60	45	36	30	24	18	12	9				
	8		36	24	18	14	12	9							
	10	22	15	11	9										
					Conserv	ative Los	s Adjustr	nent for	CCA 459	%					
					С	CA WIRE	AMPERA	AGE in Fe	eet						
		10	20	30	40	50	60	75	100	150	200	350	500	750	1000
	000							52	40	26	20	12	8	6	4
	1/0							34	25	17	13	8	5		
GAUGE	3				31	25	21	16	11	8	7	4			
	4			33	25	20	17	13	10	7	5				
	8		20	13	10	8	7	5							
	10	12	8	6	5										

WIRE: POWER WIRE

POWER WIRE



1/0GA

SHW10B (50Ft/15.2m Roll): Blue SHW10G (50Ft/15.2mRoll): Gray SHW10C (50Ft/15.2m Roll): Clear SPW10TR (50Ft/15.2m Roll): Matte Red SPW10TB (50Ft/15.2m Roll): Matte Black

4GA

SHW14B20 (20Ft/6.1m Blister): Blue SHW14C7 (7Ft/2.1m Blister): Clear SHW14B (100Ft/30.5m Roll): Blue **SHW14G** (100Ft/30.5m Roll): Gray SHW14C (100Ft/30.5m Roll): Clear SPW14TR (100Ft/30.5m Roll): Matte Red SPW14TB (100Ft/30.5m Roll): Matte Black SPW14TR250 (250Ft/76.2m Roll): Matte Red SPW14TB250 (250Ft/76.2m Roll): Matte Black

8GA

SHW18B20 (20Ft/6.1m Blister): Blue SHW18C7 (7Ft/2.1m Blister): Clear SHW18B (250Ft/76.2m Roll): Blue SHW18G (250Ft/76.2m Roll): Gray SHW18C (250Ft/76.2m Roll): Clear SPW18TR (250Ft/76.2m Roll): Matte Red SPW18TB (250Ft/76.2m Roll): Matte Black SPW18TR500 (500Ft/152.4m Roll): Matte Red SPW18TB500 (500Ft/152.4m Roll): Matte Black

10GA

SPW110TR (250Ft/76.2m Roll): Matte Red SPW110TR500 (500Ft/152.4m. Roll): Matte Red SPW110TB (250Ft/76.2m Roll): Matte Black SPW110TB500 (500Ft/152.4m. Roll): Matte Black

1/0GA POWER WIRE			
SHW10B	SHW10G	SHW10C	SPW10TR 1/0GA Matte Red
1/0GA Matte Blue	1/0GA Matte Gray	1/0GA Matte Clear	
(50Ft/15.2m Roll) 4214 strands	(50Ft/15.2m Roll) 4214 strands	(50Ft/15.2m Roll) 4214 strands	(50Ft/15.2m Roll) 4214 strands
4214 SUALIOS	4214 Stranus	4214 Stranus	4214 Stranus
	4GA POWER WIRE		
SPW10TB	SHW14B20	SHW14C7	SHW14B
1/0GA Matte Black	4GA Matte Blue	4GA Matte Clear	4GA Matte Blue
(50Ft/15.2m Roll)	(20Ft/6.1m Blister)	(7Ft/2.1m Blister)	(100Ft/30.5m Roll)
4214 strands	1666 strands	1666 strands	1666 strands
SHW14G 4GA Matte Gray (100Ft/30.5m Roll) 1666 strands	SHW14C 4GA Matte Clear (100Ft/30.5m Roll) 1666 strands	SPW14TR 4GA Matte Red (100Ft/30.5m Roll) 1666 strands	SPW14TR250 4GA Matte Red (250Ft/76.2m Roll) 1666 strands

WIRE: POWER WIRE

8GA POWER WIRE

] []	8GA POWER WIRE	
SPW14TB 4GA Matte Black (100Ft/30.5m Roll) 1666 strands	SPW14TB250 4GA Matte Black (250Ft/76.2m Roll) 1666 strands	SHW18B20 8GA Matte Blue (20Ft/6.1m Blister) 665 strands	SHW18C7 8GA Matte Clear (7Ft/2.1m Blister) 665 strands
SHW18B 8GA Matte Blue (250Ft/76.2m Roll) 665 strands	SHW18G 8GA Matte Gray (250Ft/76.2m Roll) 665 strands	SHW18C 8GA Matte Clear (250Ft/76.2m Roll) 665 strands	SPW18TR 8GA Matte Red (250Ft/76.2m Roll) 665 strands
			10GA POWER WIRE
SPW18TR500 8GA Matte Red (500Ft/152.4m Roll) 665 strands	SPW18TB 8GA Matte Black (250Ft/76.2m Roll) 665 strands	SPW18TB500 8GA Matte Black (500Ft/152.4m Roll) 665 strands	SPW110TR 10GA Matte Red (250Ft/76.2m Roll) 413 strands
SPW110TR500 10GA Matte Red (500Ft/152.4m Roll)	SPW110TB 10GA Matte Black (250Ft/76.2m Roll)	SPW110TB500 10GA Matte Black (500Ft/152.4m Roll)	

WIRE: SPEAKER WIRE



10 GA

SHW510G (50 Ft Roll): Gray

12 GA

SPW512BK(250Ft/76.2m Roll): Black SPW512B (100Ft/30.5m Roll): Blue SPW512B250 (250Ft/76.2m Roll): Blue SHW512G (100Ft/30.5m Roll): Gray SHW512G250 (250Ft/76.2m Roll):Gray

14GA

SHW514B15 (15Ft/4.6m Blister): Blue **SPW514BK** (500Ft/152.4m Roll): Black

16 GA

SHW516B50 (50Ft/15.2m Blister): Blue SHW516B (250Ft/76.2m Roll): Blue

16 GA Cont'd

SHW516B500 (500Ft/152.4m Roll): Blue SHW516G (250Ft/76.2m Roll):Gray SHW516G500 (500Ft/152.4m Roll): Gray SPW516GY (500Ft/152.4m Roll): Gray SPW516BK (500Ft/152.4m Roll): Black SPW516WH (500Ft/152.4m Roll): White SPW516RB (1000Ft/304.8m Roll): Red / Black SPW516C500 (500Ft/152.4m Roll): Clear SPW516C (1000Ft/304.8m Roll): Clear

18 GA

SPW518BK1 (1000Ft/304.8m Roll): Black **SPW518C**(1000Ft/304.8m Roll): Clear

20 GA

SPW520RB (500Ft/152.4m Roll): Red/Black

10GA SPEAKER WIRE	12GA SPEAKER WIRE		
	Section 1		State
SHW510G	SPW512BK	SHW512B	SHW512B250
10GA Matte Gray	12GA Black	12GA Matte Bue	12GA Matte Bue
(50Ft/15.2m Roll) 462 strands	(250Ft/76.2m Roll) 238 strands	(100Ft/30.5m Roll) 238 strands	(250Ft/76.2m Roll) 238 strands
		14GA SPEAKER WIRE	
Strip:			
SHW512G	SHW512G250	SHW514B15	SPW514BK
12GA Matte Gray (100Ft/30.5m Roll)	12GA Matte Gray (250Ft/76.2m Roll)	14GA Matte Blue (15Ft/4.6m Blister)	14GA Black (500Ft/152.4m Roll)
238 strands	238 strands	182 strands	182 strands
16GA SPEAKER WIRE			
SHW516B50 16GA Matte Blue (50Ft/15.2m Blister) 65 strands	SHW516B 16GA Matte Blue (250Ft/76.2m Roll) 65 strands	SHW516B500 16GA Matte Blue (500Ft/152.4m Roll) 65 strands	SHW516G 16GA Matte Gray (250Ft/76.2m Roll) 65 strands


WIRE: SPEAKER WIRE

SHW516G500 16GA Matte Gray	SPW516GY 16GA Gray	SPW516BK 16GA Black	SPW516WH 16GA White
(500Ft/152.4m Roll) 65 strands	(500Ft/152.4m Roll) 65 strands	(500Ft/152.4m Roll) 65 strands	(500Ft/152.4m Roll) 65 strands
			18GA SPEAKER WIRE
SPW516RB	SPW516C500	SPW516C	SPW518BK1
16GA Red Black (1000Ft/304.8m Roll)	16GA Clear (500Ft/152.4m Roll)	16GA Clear (1000Ft/304.8m Roll)	18GA Black
26 strands	26 strands	26 strands	(1000Ft/304.8m Roll) 41 strands
SPW518C 18GA Clear (1000Ft/304.8m Roll) 16 strands	20GA SPEAKER WIRE/L		
9 Conductor Speedwire 18GA EIA Standard Color Code SGW9920 : 20Ft/6.1m Blist SGW991: 100Ft/30.5m R SGW992: 250Ft/76.2m R	er oll	5 Conductor Speedwire 18GA EIA Standard Color Code SGW951 : 100Ft/30.5m F	

WIRE: PRIMARY WIRE

Our primary installation wire is constructed of OFC copper for high current transfer. With a wide variety of colors and applications, Stinger has your installation needs covered.

- · High-Temp/Flexible/PCV Jacket
- \cdot Ranging from 12GA to 18GA
- \cdot Interior or Under Hood Applications

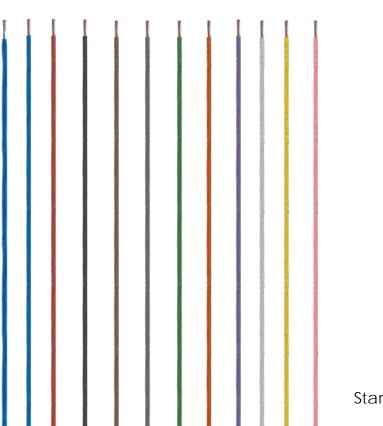




Standing Wire Rack with Locking Wheels 52" H x 24" W x 21" D



WIRE: PRIMARY WIRE

12GA PRIMARY WIRE	SPW312RD 12GA Red (500Ft/152.4m Roll)	SPW312BK 12GA Black (500Ft/152.4m Roll)	Stanger H H H H H H H H H H H H H H H H H H H
14GA PRIMARY WIRE	SPW314RD 14GA Red (500Ft/152.4m Roll)	SPW314BK 14GA Black (500Ft/152.4m Roll)	SGM2N Standing Wire Rack w/ Locking Wheels 52" H x 24" W x 21" D
16GA PRIMARY WIRE	SPW316RD 16GA Red (500Ft/152.4m Roll)	SPW316BK 16GA Black (500Ft/152.4m Roll)	
SPW316BL 16GA Blue (500Ft/152.4m Roll)	SPW316YL 16GA Yellow (500Ft/152.4m Roll)	SPW516RB 16GA Red Black (500Ft/152.4m Roll)	


WIRE: PRIMARY WIRE

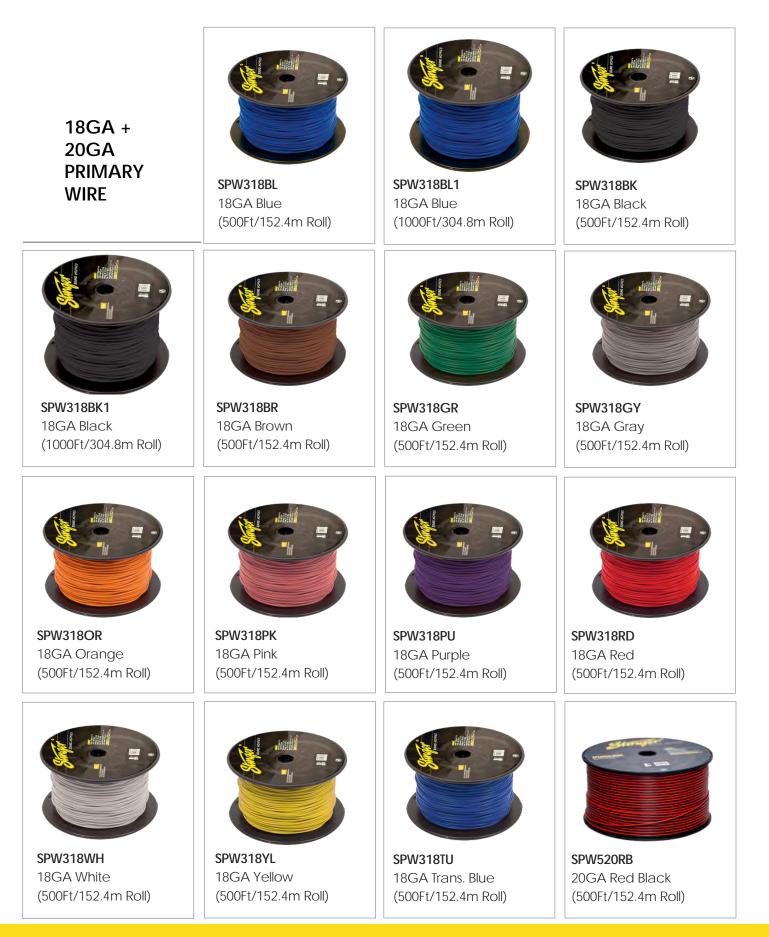

NOTES:

Interconnects

Stinger offers peak performance interconnects that are flexible and look great even in highly complicated installations.

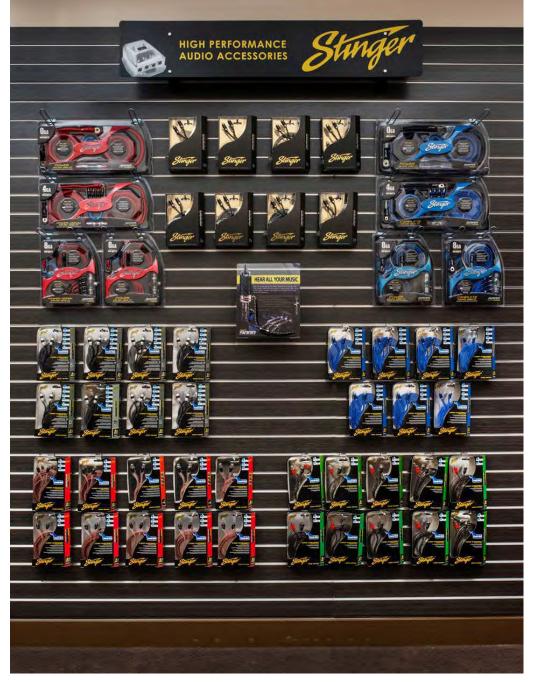

Stinger's modular planogram programs simplify the ordering process. See the Merchandising section for detailed merchandising kits and planogram solutions.


INTERCONNECTS: 9000 SERIES

9000 SERIES OF INTERCONNECTS

Made to deliver the best bass response, openness, tonality, and accuracy possible while drastically reducing electrical resistance and interference.



INTERCONNECTS: 8000 SERIES

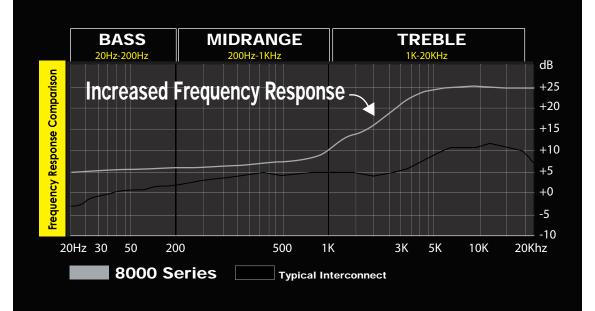



FEATURES

- Stinger Audiophile Grade Design Improves Sound Quality, Noise Rejection, and Offers Easy Installation
- Oversized Silver-Plated Copper Conductors Provide Tight Bass Response, and Crystal Clear Highs
- Combination of Copper and Silver Allows for Extended Frequency Response
- ▶ Mono Cable Design with Undersized Stopper
- ► Molded Strain Reliefs for Excellent Durability
- ► Locking Split-Tip Connectors Allow Better Signal Transfer
- No Solder Joints for True Channel Separation and Connection Reliability
- Precision Machined "Locking" Metal Ends with Channel Identification
- ► Twisted Pair Winding Patterns Improve Clarity and Ensure Consistent Timing
- ▶ Pewter Finished Ends for High-End Installs
- Black Mesh Protective Jacket Looks Great and Minimizes Friction for Easy Install
- Directional High Rate Double Twisted-Pair Construction Provides Protection against Interference
- ► Triple Braided Shielding Construction for Increased Noise Rejection
- ▶ Mylar Shielding for Increased Noise Rejection
- ▶ 3 Conductors per Channel for a Total of 6 Conductors (2 Channels)
- Continuous Connection Construction (C3 Tech) Provides Unmatched Signal Transfer

2-CHANNEL INTERCONNECTS SI8220: Length: 20Ft/6.1m SI8217: Length: 17Ft/5.2m SI8212: Length: 12Ft/3.7m SI826: Length: 6Ft/1.8m SI823: Length: 3Ft/0.9m 4-CHANNEL INTERCONNECTS SI8420: Length: 20Ft/6.1m SI8417: Length: 17Ft/5.2m SI8412: Length: 12Ft/3.7m

Stinger


Stanger

Split-Tip Ends Precision Machined, Locking, Metal RCA Ends Continuous Connection Construction (C3 Tech)

> Silver-Plated OFC Conductors
> Directional Drain Wire
> Dual Mylar and Braided Shield
> Mesh Protective Layer

Y CONNECTORS SI82YF: 2 female - 1 male SI82YM: 2 male - 1 female

INTERCONNECTS: 6000 SERIES

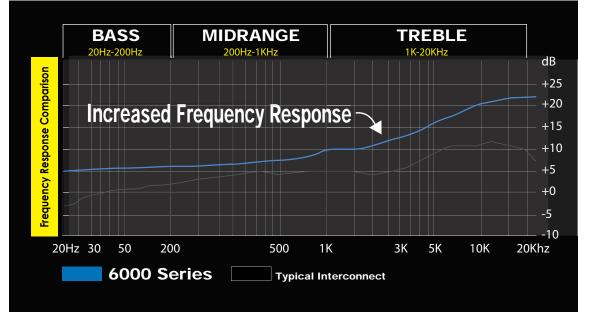




FEATURES:

- Stinger Audiophile Grade Design Improves Sound Quality, Noise Rejection, and Offers Easy Installation
- Oversized OFC Conductors Provide Excellent Sound Quality
- Continuous Connection Construction (C3 Tech) Provides Unmatched Signal Transfer
- ▶ Mylar Shielding for Increased Noise Rejection
- ▶ Directional Twisted-Pair Construction Provides Protection against Interference
- ▶ Split-Tip Machined Metal Connector Allows Better Signal Transfer
- ▶ Twisted Pair Winding Patterns Improve Clarity and Broaden Dynamic Range
- ▶ Blue Protective Jacket Looks Great and Minimizes Friction for Easy Install
- Molded Strain Reliefs for Excellent Durability
- ▶ 3 Conductors per Channel for a Total of 6 Conductors (2 Channels)
- Color Coded Channel Identification



2-CHANNEL INTERCONNECTS SI6220: Length: 20Ft/6.1m SI6217: Length: 17Ft/5.2m SI6212: Length: 12Ft/3.7m SI626: Length: 6Ft/1.8m SI623: Length: 3Ft/0.9m 4-CHANNEL INTERCONNECTS SI6420: Length: 20Ft/6.1m SI6417: Length: 17Ft/5.2m SI6412: Length: 12Ft/3.7m Y CONNECTORS SI62YF: 2 female - 1 male SI62YM: 2 male - 1 female

INTERCONNECTS: 4000 SERIES

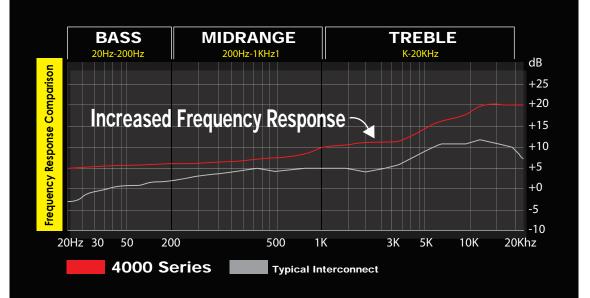



FEATURES

- Stinger Audiophile Grade Design Improves Sound Quality, Noise Rejection, and Offers Easy Installation
- Oversized OFC Conductors Provide Excellent Sound Quality
- Continuous Connection Construction (C3 Tech) Provides Unmatched Signal Transfer
- ▶ Split-Tip Connector Allows Better Signal Transfer
- ► Stinger Audiophile Grade Design Improves Sound Quality, Noise Rejection, and Offers Easy Installation
- Compact Connector Design for Easy Installation
- Twisted Pair Winding Patterns Improve Clarity and Broaden Dynamic Range
- Minimalistic Clear Protective Jacket Looks Great and Minimizes Friction for Easy Install
- Molded Strain Reliefs for Extra Durability
- ▶ Directional Twisted-Pair Construction Provides Protection against Interference
- Stingers Proprietary Shoc-Krome-Plated Connectors for Excellent Signal Transfer
- Color Coded Channel Identification

2-CHANNEL INTERCONNECTS **SI4220:** Length: 20Ft/6.1m **SI4217:** Length: 17Ft/5.2m **SI4215:** Length: 15Ft/4.6m **SI4212:** Length: 12Ft/3.7m **SI429:** Length: 9Ft/2.7m **SI426:** Length: 6Ft/1.8m **SI423:** Length: 3Ft/0.9m **SI421.5:** Length: 1.5Ft/0.5m 4-CHANNEL INTERCONNECTS **SI4420:** Length: 20Ft/6.1m **SI4417:** Length: 17Ft/5.2m **SI4412:** Length: 12Ft/3.7m 6-CHANNEL INTERCONNECTS **SI4620:** Length: 20Ft/6.1m **SI4617:** Length: 17Ft/5.2m **SI4612:** Length: 12Ft/3.7m 3.5mm TO RCA **SI436:** Length: 6Ft/1.8m **SI433:** Length: 3Ft/0.9m 3.5mm TO 3.5mm **SI416:** Length: 6Ft/1.8m **SI413:** Length: 3Ft/0.9m



AUDIO/VIDEO SI4920: Length: 20Ft/6.1m SI4917: Length: 17Ft/5.2m SI4912: Length: 12Ft/3.7m SI496: Length: 6Ft/1.8m SI493: Length: 3Ft/0.9m VIDEO

SI4820: Length: 20Ft/6.1m SI4817: Length: 17Ft/5.2m SI4812: Length: 12Ft/3.7m SI486: Length: 6Ft/1.8m SI483: Length: 3Ft/0.9m


INTERCONNECTS: 1000 SERIES

Precision RCA Ends

Coaxial Construction

Color Coded Channel Identification

Heavy Gauge OFC Conductors

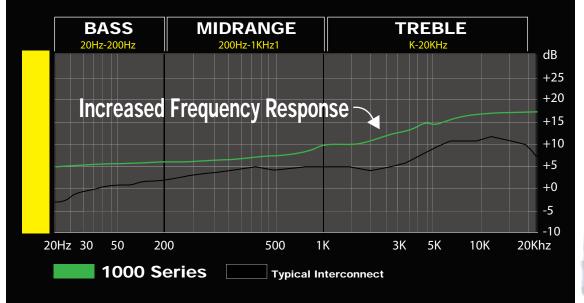



FEATURES

- ► Audiophile Grade Performance on a Budget
- ► Co-Axial Construction with Two Conductors per Channel
- Compact Molded Ends with Colored Channel Identifiers
- ► Noise Rejecting Coaxial Construction
- ► Heavy Gauge Conductors Provide Great Sound Quality
- ▶ High Strength Molded Strain Reliefs for Excellent Durability
- Continuous Connection Construction (C3 Tech) Provides Unmatched Signal Transfer
- ► Shoc-Krome Ends for High Quality Performance without Corrosion

2-CHANNEL INTERCONNECTS SI1220: Length: 20Ft/6.1m SI1217: Length: 17Ft/5.2m SI1215: Length: 15Ft/4.6m SI1212: Length: 12Ft/3.7m SI129: Length: 9Ft/2.7m SI126: Length: 6Ft/1.8m SI123: Length: 3Ft/0.9m SI121.5: Length: 1.5Ft/0.5m

Y CONNECTORS

SI12YF: 2 female - 1 male SI12YM: 2 male - 1 female




INTERCONNECTS: MARINE



Stinger marine interconnect cables are specifically designed to thrive in the marine environment, enhancing your audio experience off-shore.

- Comprised of Tinned OFC Copper Conductors with Polyethylene Dielectrics Assembled in a High Rate Twisted-Pair Configuration for Ultimate Noise Rejection
- ► The White Outer PVC Jacket is Flexible for Easy Routing through Tight Spaces.
- ► Molded Connectors with Machined, Nickel-Plated, Brass Contacts Offer Superior Connection Integrity, Signal Transfer and Maximum Corrosion Resistance
- SMRAUX Input Utilizes a Splash-Proof Cover to Keep the Connections Intact*
 *Only Available on SMRAUX and SMAUXUSB3

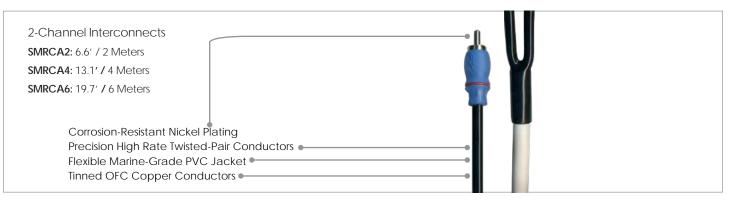

3.5mm Audio Input to Female RCA
SMRAUX: 21" / 0.5m
Splash-Proof Cover
Easy and Secure Mounting with Threaded Body
Corrosion-Resistant Plated 3.5mm Audio Jack
Flexible Marine-Grade PVC Jacket

3.5mm Audio Input to Male RCA & USB 3.0 SMRAUXUSB3: 21" / 0.5m

- Splash-Proof Cover
- Easy and Secure Mounting with Threaded Body
- Ultra High Speed USB 3.0
- Corrosion Resistant Plated Flexible Marine-Grade PVC Jacket





SEE SPECIALITY VEHICLE SECTIONS IN THIS CATALOG FOR OUR FULL OFF-ROAD AND OFF-SHORE RANGE

NOTES:

Roadkill

OBLITERATE UNWANTED NOISE WITH ROADKILL SOUND DAMPING SOLUTIONS

- ▶ Kills panel resonance, squeaks, and rattles
- Improves overall audio frequency response and bass output
- ► For use on all metal panels, doors, roof, floor, firewall & trunk
- ► Self-adhesive for easy installation

SOLUTIONS ENGINEERED FOR SPECIFIC APPLICATIONS DELIVERING ULTIMATE PERFORMANCE

ULTIMATE - Joining our Expert and Overkill materials for the Ultimate noise killer, comprised of an acoustic foam outer layer, aluminum middle layer, and a proprietary, ultra-dense butyl blend bottom layer

EXPERT- Unlimited uses, material built from an aluminum outer layer (6 mils), and an ultra-dense butyl blend bottom layer (0.65 lbs/ft²)

STEALTH- When you want premium sound damping without the weight, at 0.45 lbs/ft². Stealth is comprised of a black aluminum layer at 4 mils with a lightweight butyl layer

HOOD LINER- Isolates engine noise and heat, comprised of a heat reflecting aluminum layer with heat-resistant and sound absorbing foam layer

OVERKILL- Dense 1/4" foam for interior door panel damping, decimates high frequency noise and commonly used as a barrier/gasket material

CARPET PAD- Used under carpet for a massive reduction in low frequency road noise, a dual layer construction with a dense rubber barrier and foam isolation

SPEAKER WAVE RINGS- Installed behind door speakers to reduce distortion, acoustic foam disperses standing waves for enhanced sound quality



FAST RINGS- Increases speaker output, improves the projection of the audio into the car cabin and reduces unwanted rear reflections that can degrade the sound, includes gasket for speaker mounting to the baffle plate surface, middle ring to mount around the outer edge of the speaker and circular foam pad that goes behind the speaker to absorb unwanted reflections



SGM104N Slatwall Header



Tabletop or Slatwall Interactive Display 17" x 17"



SGMRK Tabletop or Slatwall Material Display 14" x 14"



SGM8N Floor Standing Display

RoadKill ULTIMATE

RoadKill Ultimate combines the benefits of our Expert aluminum/butyl material and Overkill acoustic foam to create the ultimate noise killer. The combination of these two products will more than double the results than when used on their own.

Reduce a massive amount of unwanted resonating noise (panel vibrations, road noise, exhaust, engine noise & vibration) allowing your audio system to sound even louder and with more clarity and definition.

FEATURES:

- Improves overall audio frequency response and bass output
- Kills panel resonance, squeaks and rattles
- Self-adhesive for easy installation

5.5mm	Minimum Thickness
0.55lbs/ft ²	Weight
3 mil	Aluminum Layer
2 mil	Foam Layer

RoadKill Ultimate

Waterproof

ROADKILL ULTIMATE DNA

MPROVES SOUND

Acoustic foam outer layer that absorbs and diffuses high frequency sounds, acts as a thermal barrier, and absorbs soundwaves that are otherwise trapped inside the empty space behind door panels.

Use on all metal panels, doors, roof, floor, firewall & trunk Highest damping vs. weight ratio of any material available






9/pack (18" x 32")




RoadKill EXPERT



ROADKILL EXPERT FEATURES:

- Aluminum outer layer
- Self-adhesive
- Easy installation
- Use on all metal panels, doors, roof, floor, firewall & trunk
- Kills panel resonance, squeaks and rattles
- > Highest damping vs. weight ratio of any material available
- Improves overall audio frequency response and bass output




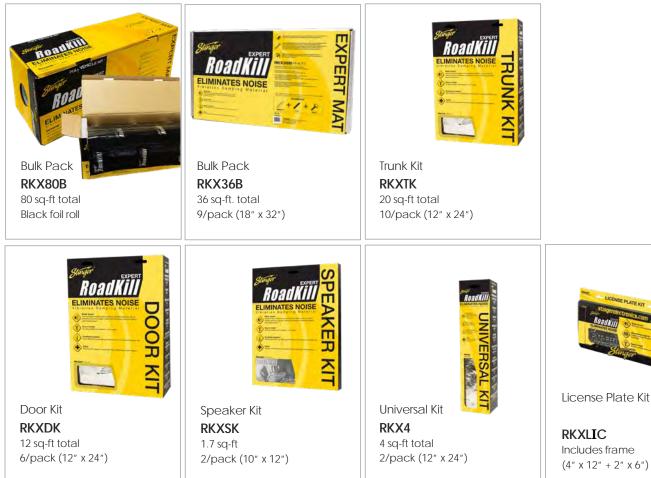



SPEAKER STANDING WAVE RINGS

Eliminate increased distortion and decreased bass response caused by standing waves with one quick-step install Stinger RoadKill Speaker Standing Wave Rings. Stinger RoadKill Speaker Standing Wave Rings absorb and deflect rear energy from the back of the speaker, keeping the energy from returning and interfering with the front wave output. The easy peel and stick adhesive allows for fast, clean installation when adding these rings to speaker installs, while the egg crate acoustic foam decreases distortion and increases bass response.

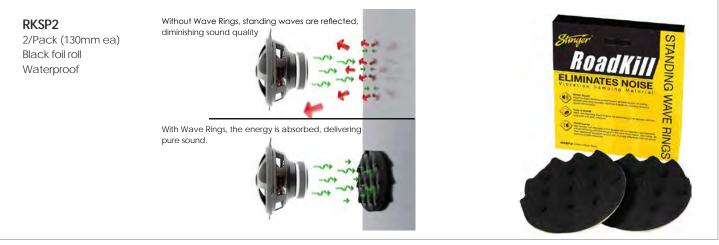

FAST RINGS

Our 3-piece foam ring speaker enhancement system solves the problem of acoustically coupling aftermarket speakers to factory speaker openings. The RoadKill Fast Rings kit increases speaker output, improves the projection of the audio into the car cabin and reduces unwanted rear reflections that can degrade the sound.

RKFR6 fits 6" and 6.5" Speakers

RKFR69 fits 6 x 9" Speakers

RKFR5 fits 5" and 5.25" Speakers

RKFR5768 fits 5 x 7" and 6 x 8" Speakers

INCLUDES:

- 1. Circular foam pad goes behind the speaker to absorb unwanted reflections on hard surfaces, such as inside a car door
- 2. Middle ring to mount around the outer edge of the speaker
- 3. Gasket for speaker mounting to the baffle plate surface







PART NUMBER	WATTAGE	SERIES
SPP2250	6000+	POWER ² SERIES
SEA27	4300+	MARINE SERIES
SEA31	4300+	MARINE SERIES
SPP2150	4300+	POWER ² SERIES
SPP1750DC	3250+	POWER ² SERIES
SPP1700	3150+	POWER ² SERIES
SPP1500DC	3000+	POWER ² SERIES
SPP1500DCR	3000+	POWER ² SERIES
SPP1300C	2600+	POWER ² SERIES
SPX1200	2400+	POWER SPORTS
SPP1200	2400+	POWER ² SERIES
SPP1300C	2600+	POWER ² SERIES
SPV70	2100+	POWER SERIES
SPV69C	2000+	POWER SERIES
SPP925	1850+	POWER ² SERIES
SPX925-HD	1850+	HARLEY-DAVIDSON
SPX925	1850+	POWER SPORTS
SPP680	1360+	POWER ² SERIES
SPV44	1320+	POWER SERIES
SPV35	1050+	POWER SERIES
SPV20	600+	POWER SERIES

Batteries Stinger batteries are the heart of your sound system.

Stinger batteries are the heart of your sound system. They provide the quality and performance needed to run the kind of powerful system any car audio enthusiast would love.

BATTERIES

POWER² SERIES MARINE SERIES POWER SPORTS SERIES

3-Year Warranty

POWER SERIES

1-Year Warranty

More Power per Pound Than Any Other AGM/Lead Acid Battery



- Powerful AGM (Absorbed Glass Mat) Technology
- Corrosion and Maintenance-Free
- Durable Machined Copper-Alloy Terminal Posts
- Protective Metal Jacket
- High Energy Thin Plate Design

VERSUS

Poor Battery Life / Installation Flexibility Weak Connections Inferior Power to Weight Ratio Damaged by Vibration Performance-Limiting Design



OEM BATTERIES GROUP SIZE QUICK REFERENCE GUIDE

GROUP	WATTS	PART
24F	3000+	SPP1500DCR*
31	4300+	SPP2150
34	3000+	SPP1500DC
34	2000+	SPV69C
34M	3000+	SPP1500DC
34M	2000+	SPV69C
34R	3000+	SPP1500DCR
35	3000+	SPP1500DCR*
51	1050+	SPV35
65	3250+	SPP1750DC
75	2600+	SPP1300C
78	3000+	SPP1500DC
78	2000+	SPV69C
86	2400+	SPP1300C

3-Tier Battery Rack

*FITS MOST VEHICLES IN GROUP

BATTERIES: POWER² SERIES

SPP2250

6000+ WATTS



Features:

- CCA: 1420A
- Peak Discharge: 5000+ Amps
- 5 Second Cranking Amps: 2250A
- Internal Resistance: <2.2 mOhms</p>
- ▶ 120Ah
- Includes Metal Jacket

Dimensions:

- (8.11" H x 10.43" W x 11.02"L) (8.27" Total Height)
- (206mmH x 265mmW x 280mmL) (210mm Total Height)
- Weight: 85.32 lbs / 38.7kg

SPP2150

OEM FIT 4300+ WATTS GROUP 31

Features:

- CCA: 1050A
- Peak Discharge: 5000+ Amps
- 5 Second Cranking Amps: 2150A
- Internal Resistance: <2.2 mOhms</p>
- ▶ 105Ah
- Includes Metal Jacket

Dimensions:

- Group 31 Marine standard
- (8.43" H x 6.77" W x 12.99" L) (8.66" Total Height)
- (214mmH x 172mmW x 330mmL) (220mm Total Height)
- Weight: 74.96 lbs / 34kg

SPP1750DC

OEM FIT 3250+ WATTS, GROUP 65



Features:

- ► CCA: 950A
- Peak Discharge: 3400+ Amps
- ▶ 5 Second Cranking Amps: 1750A
- Internal Resistance: <3.1 mOhms</p>
- ▶ 75Ah
- Includes Metal Jacket

Dimensions:

- Group 65
- (6.67" H x 7.01" W x 11.81"L) (7.38" Total Height)
- (169.5mmH x 178mmW x 300mmL) (187.5mm Total Height)
- Weight: 561lbs / 25.4

SPP1700

3150+ WATTS

Features:

- CCA: 1050A
- Peak Discharge: 3300+ Amps
- ▶ 5 Second Cranking Amps: 1700A
- ▶ Internal Resistance: <3.5 mOhms
- ▶ 70Ah
- Includes Metal Jacket

Dimensions:

- (7.05" H x 6.57" W x 13.82"L)
- (179mm H x 167mm W x 351mm L)
- Weight: 54.67./ 24.8kg

BATTERIES: POWER² SERIES

SPP1500DC

OEM FIT 3000+ WATTS, GROUP 34/34M/78



Features:

- CCA: 825A
- Peak Discharge: 3100+ Amps
- 5 Second Cranking Amps: 1500A
- Internal Resistance: <3.0 mOhms</p>
- ▶ 65Ah
- Includes Metal Jacket

Dimensions:

- OEM Mounting including GM/Ford and other Group 34/34M/78 vehicles
- (7.19" H x 7.09" W x 10.28"L) (8.15" Total Height)
- (182.5mmH x 180mmW x 261mmL) (207mm Total Height)
- Weight: 46.52lbs / 21.10kg

SPP1300C

OEM FIT 2600+ WATTS, GM AND GROUP 75/86



Features:

- CCA: 560A
- Peak Discharge: 2600+ Amps
- ▶ 5 Second Cranking Amps: 1200A
- ▶ Internal Resistance: <4.0 mOhms
- ▶ 44Ah
- ▶ Includes Metal Jacket

Dimensions:

- OEM Mounting including GM and other Group 75/86 vehicles
- (7.48" H x 6.89" W x 9.49" L)
- (190mmH x 175mmW x 241mmL)
- Weight: 42.11lbs / 19.10kg

SPP1500DCR

OEM FIT 3000+ WATTS, GROUP 34R / MOST 24F/35 (RIGHT HAND POSITIVE TERMINAL)

Features:

- CCA: 825A
- Peak Discharge: 3100+ Amps
- 5 Second Cranking Amps: 1500A
- Internal Resistance: <3.0 mOhms</p>
- ▶ 65Ah
- Includes Metal Jacket

Dimensions:

- OEM Mounting including Nissan/Honda and other Group 34R (Most 24F/35)vehicles (right hand positive terminal)
- (7.19" H x 7.09" W x 10.28" L) (8.15" Total Height)
- (182.5mmH x 180mmW x 261mmL) (207mm Total Height)
- Weight: 46.52lbs / 21.10kg

SPP1200

2400+ WATTS

Features:

- CCA:560A
- Peak Discharge: 2600+ Amps
- ► 5 Second Cranking Amps: 1200A
- ► Internal Resistance: <4.0 mOhms
- ▶ 5 hour rate: 7.48A/37.4Ah
- Includes Metal Jacket

Dimensions:

- ► (6.69" H x 6.54" W x 7.80" L)
- (170mmH x 166mmW x 198mmL)
- Weight: 33.29lbs / 15.10kg

BATTERIES: POWER² + POWER SERIES



Weight: 23.59lbs / 10.70kg

(167mmH x 77mmW x 1 Weight: 15.43 lbs / 7kg

SPV70



- ▶ 70Ah
- Includes Metal Jacket

Dimensions:

- (7.05" H x 6.57" W x 13.82"L)
- (179mmH x 167mmW x 351mmL)
- Weight: 54.67./ 24.8kg

SPV69C

OEM FIT 2000+ WATTS GM/FORD AND GROUP 34/34M/78

Features:

- CCA: 775A
- ┝ 69Ah
- Internal Resistance: <4 mOhms</p>
- 5 Second Cranking Amps: 1100A
- Side Terminals Available Separately (SPT55310)
- Includes Metal Jacket
- OEM Mounting Foot GM/Ford

Dimensions:

- (7.19" H x 7.09" W x 10.28"L) (8.15" Total Height)
- (182.5mmH x 180mmW x 261mmL) (207mm Total Height)
- Weight: 46.52lbs / 21.10kg
- OEM Mounting including Honda and other Group 51* vehicles
- *some applications require modification for polarity

BATTERIES: POWER SERIES

SPV44

1320+ WATTS



Features:

- CCA:550A
- 5 Second Cranking Amps: 725A
- ▶ Internal Resistance: <5 mOhms
- 🕨 44Ah
- Includes Metal Jacket

Dimensions:

- (6.69" H x 6.54" W x 7.80" L)
- (198mmH x 166mmW x 170mmL)
- Weight: 33.29 lbs / 15.10kg

SPV35

OEM FIT 1050+ WATTS HONDA AND GROUP 51

SPV35 POVER SV35

Features:

- CCA: 438A
- ► 5 Second Cranking Amps: 525A
- Internal Resistance: <6 mOhms</p>
- > 35Ah
- Includes Metal Jacket

Dimensions:

- ► (6.57″ H x 5.16″ W x 7.72″L)
- (167mm H x 131mm W x 196mmL)
- Weight: 26.68 lbs / 12.1 kg
- OEM Mounting including Honda and other Group 51* vehicles

*some applications require modification for polarity

SPV20

600+ WATTS

Features:

- CCA: 230A
- 5 Second Cranking Amps: 300A
- Internal Resistance: <6 mOhms</p>
- **>** 20Ah
- Metal Jacket Sold Separately (SPCASE)

Dimensions:

- (6.57" H x 3.03" W x 7.13" L)
- (167mmH x 77mmW x 181mmL)
- Weight: 15.43 lbs / 7kg

SPT55310

Adds side power hook ups to batteries that come with copper-alloy posts, Converts Stinger battery to GM Side Post. Includes short & long style.



FITS: SPP1500DC, SPP1500DCR, SPP1300C, SPV69___



SPCASE Features:

- Protects battery from puncture
- Enables higher heat applications
- Provides mounting options
- Works with SPV20





HARLEY-DAVIDSON AUDIO ACCESSORIES



Thin plates allow more power on demand for easier starting while powering multiple accessories

ACCESSORIZE YOUR HARLEY

The Stinger Harley-Davidson line is built to complement any sound system upgrade, improving sound quality and component efficiency. Our direct replacement battery is just the start, discover our full line in the V-Twin section in this catalog. Sound damping, radio replacement kits and more.

SPX925-HD HARLEY-DAVIDSON DIRECT REPLACEMENT BATTERY

- · Watts: 1850+
- · CCA: 410A
- · Peak Discharge: 2400+ Amps
- 5 Second Cranking Amps: 925A
- Internal Resistance: <5.0 mOhms
 28Ah
- · 3 Year Full Replacement Warranty

Dimensions:

- (4.92" H x 6.93" W x 6.50" L)
- (125.5mmH x 176mmW x 165mmL)
- Weight: 23.59lbs / 10.70kg

Replaces the following batteries:
 66010-97C, 66010-97B, 66010-97A,
 66010-97



BATTERIES: SPECIALTY VEHICLES

SEA27 GROUP 27

▶ 4300 Watts

<3.0 mOhms

CCA: 950A

Dimensions:

> 20 hour rate: 3.9A/75Ah

▶ 5 hour rate: 12.5A/62.5Ah

Peak Discharge: >3400 A

1/2 hour rate: 109A/54.5Ah

5 Second Cranking Amps: 1750A

(8.31" H x 12.09" W x 6.65" D)

MARINE BATTERIES





- 4300 Watts
- 12v Dry Cell Valve Regulated Lead Acid Battery (AGM)
- Good for over 400 full discharge cycles
- Quickly delivers power with an internal resistance of <2.2 mOhms</p>
- 20 hour rate: 5.25A/105Ah
- 5 hour rate: 17.8A/89Ah
- 1/2 hour rate: 130A/65Ah
- 5 Second Cranking Amps: 2150A
- CCA: 1050A
- Peak Discharge: >5000 A

Dimensions:

- (9.40" H x 13.0" W x6.80" D)
- Weight: 74.96 lbs

POWER SPORTS BATTERIES

SPX925

Vibration Resistant Power Sports Battery



Features:

- Watts: 1850+
- CCA: 410A
- Peak Discharge: 2400+ Amps
- 5 Second Cranking Amps: 925A
- ► Internal Resistance: <5.0 mOhms
- ▶ 28Ah
- Includes Metal Jacket
- 3 Year Full Replacement Warranty

Dimensions:

- ► (4.92" H x 6.93" W x 6.50" L)
- (125.5mmH x 176mmW x 165mmL)
- Weight: 23.59lbs / 10.70kg

5

Weight: 59.56 lbs

SPX1200

Vibration Resistant Power Sports Battery

12v Dry Cell Valve Regulated Lead Acid Battery (AGM)

Quickly delivers power with an internal resistance of

Good for over 400 full discharge cycles

Features:

- ►Watts: 2400+
- CCA:560A
- Peak Discharge: 2600+ Amps
- ► 5 Second Cranking Amps: 1200A
- Internal Resistance: <4.0 mOhms
 5 hour rate: 7.48A/37.4Ah
- Includes Metal Jacket

Dimensions:

- ► (6.69" H x 6.54" W x 7.80" L)
- ▶ (170mmH x 166mmW x 198mmL)
- Weight: 33.29lbs / 15.10kg

SPXRZRBAT2 SECOND BATTERY INSTALLATION KIT FOR 2014+ POLARIS RZR

- OEM style battery bracket with hardware
- 200 Amp pre-wired isolator relay
- ▶ 90° RZR battery terminals
- Compatible with 2-seat and 4-seat models

NOTE: Requires SPX925 - Sold Separately





BATTERY ACCESSORIES AND CHARGERS

SPTG1

BATTERY CONDUCTANCE TESTER

Quickly and accurately measure the actual CCA or CA capability of 12v batteries, healthy state of the battery itself, and common fault of the vehicle starting system and charging system, which can help to troubleshoot the root cause of a problem quickly and accurately.

FEATURES

- Conductance technology, simple, fast, accurate
- Vehicle battery test
- Vehicle charging system test
- Vehicle starting system test
- Use the USB interface to connect to the computer

SPJS1

JUMP STARTER AND POWER PACK

Features:

- Powerful capability to jump start vehicles with 12V batteries
- LED flashlight with 3 modes (lighting, burst flashing, SOS)
- USB power supply for charging any USB device: Mobile phone, tablet, PC, MP3/MP4, PSP, camera and other digital devices
- Compact design for easy storage and portability (135mm x 76mm x 16mm); Weight: 222g
- Enough power to jump start multiple vehicles on one charge

Specs:

- Capacity: 6000mAh
- Input: 12V/1A; Output: 5V/2A
- Start current: 200A; Peak current: 400A
- Charging time 2 Hrs
- Operation temp. 20°C ~60°C/-4°F~120°F
- Lifetime: >1000 cycles
- > Protections Circuits: Short circuit proof, over charge protection & discharge protection
- Compliance Certifications: CE/FCC/ROHS

SBC6A

6 AMP BATTERY CHARGER/TENDER

Features:

- 6 Amp Battery Charger* / Maintainer (Stinger AGM)
- Microprocessor-Controlled for Optimum Charging
- Compact Size is Perfect for In-Vehicle Installation
- Maintains Batteries for Peak Performance
- Will Not Overcharge Stinger AGM Batteries

51/4"Lx17/8"Hx5"W

* Not designed to bring a dead battery back to full charge. For best battery life, recharge on high output charger and use SBC6A to maintain charge and for storage.

BATTERY ACCESSORIES: POWER SUPPLY

STNGER POWER SUPPLIES

Load and ambient conditions monitoring and sensing, and supplies "clean" nominal 13.6 VDC power from input voltages that range from 90-130 VAC. Operates with or without a battery connected; the output of the Stinger Power Supply is a regulated, filtered D.C. voltage that can power sensitive electronics without the need of a battery or other filtering.

Features:

- High Current Power Supply
- Battery charger (when used with optional SCM)
- Temperature regulated fan cooling
- > Can be paralleled for higher output requirements
- Charging module SCM sold separately

SCM

Charging Module for Stinger Power Supplies (SPS70, SPS60, SPS40)

- Converts Stinger Power Supply into Battery Charger
- Microprocessor Controlled for Proper Charging
- Maintains Power Supply Capability in Boost Mode
- Selectable Charging Modes, Boost, Normal, Equalizing and Storage for any Charging Requirement
- Maintains Batteries for Peak Performance

SPS70

70 AMP POWER SUPPLY

Features:

- Input: 105-130 VAC 60 Hz
- 1250 Watts
- Output: 13.6 VDC, 70 Amps
- Dimensions: 3.6" H X 9.15" L X 9" W



SPS60

60 AMP POWER SUPPLY

Features:

- Input: 105-130 VAC 60 Hz
- 1000 Watts
- Output: 13.6 VDC, 60 Amps
- Dimensions: 3.6" H X 9.15" L X 9" W

SPS40

40 AMP POWER SUPPLY


Features:

- Input: 105-130 VAC 60 Hz
- 600 watts
- Output: 13.6 VDC, 40 Amps
- Dimensions: 4.5" H X 8.625" L X 7.25" W





BATTERY ACCESSORIES: CAPACITORS

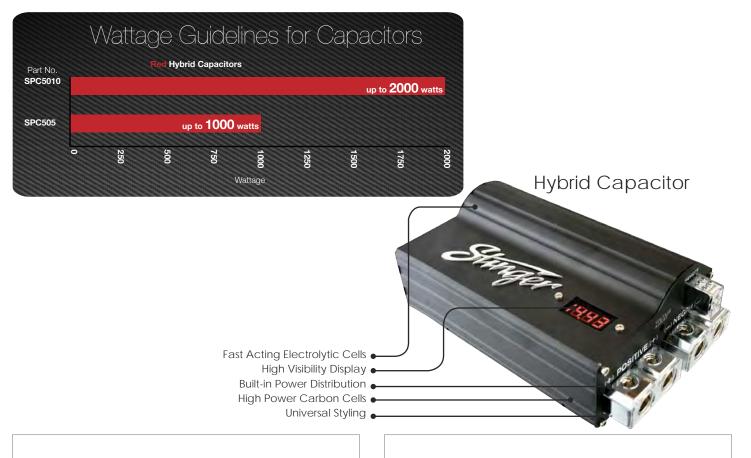



SPC5010

- 10 Farads
- · 16V -18V Surge
- · For Systems Up to 2000 Watts
- · Louder & Clearer Bass Response
- · Monitor System Voltage
- · Stabilizes Battery Voltage
- · Minimizes Headlight Dimming
- · Similar to a Battery/Capacitor Combo
- · Bright 4 Segment Red LED Display
- Accepts (2) 1/0GA or 4GA Inputs / Outputs or Combination of (1) each
- · Unique Industrial Styling
- Black Powder Coated Finish H 2" x L 14 1/4" x W 5 1/8"



SPC505

- · 5 Farads
- · 16V -18V Surge
- · For Systems Up to 1000 Watts
- · Louder & Clearer Bass Response
- · Monitor System Voltage
- · Stabilizes Battery Voltage
- · Minimizes Headlight Dimming
- · Similar to a Battery/Capacitor Combo
- Bright 4 Segment Red LED Display
- Accepts (2) 1/0GA or 4GA Inputs / Outputs or Combination of (1) each
- · Unique Industrial Styling
- · Black Powder Coated Finish
- · H 2" x L 7 1/2" x W 5 1/8"

BATTERY ACCESSORIES: TERMINALS



Adds side power hook ups to batteries that come with copper-alloy posts, Converts Stinger battery to GM Side Post. Includes short & long style. FITS: SPP1500DC, SPP1500DCR, SPP1300C, SPV69



POSITIVE DIGITAL BATTERY TERMINAL (2) 1/0GA or (2) 4GA Outputs Positive terminals only Monitor system voltage Corrosion resistant satin chrome finish



SHT303 POSITIVE OR NEGATIVE BATTERY TERMINAL (2) 1/0GA or (2) 4GA Outputs Corrosion resistant satin chrome finish



SPT53102 POSITIVE BATTERY TERMINAL (1) 1/OGA (1)4GA and (2) 8GA Output Multiple output design



for versatility Sold individually for versatility

Sold individually

BATTERY ISOLATORS/RELAYS/TERMINALS



SQD8 HIGH AMPERAGE QUICK DISCONNECT 8GA Polarity identification and one-way connection for safety Add to SPS power supplies for versatility Sold individually



SGP35 HIGH CURRENT ISOLATOR/ RELAY 500 AMP Prevents primary battery discharge Extends battery life



SGP32 HIGH CURRENT ISOLATOR/ RELAY 200 AMP Prevents primary battery discharge Extends battery life



SGP38 HIGH CURRENT ISOLATOR/ RELAY 80 AMP Prevents primary battery discharge Extends battery life



S12023 HIGH CURRENT ISOLATOR 120 AMP 4 Post Design Prevents primary battery discharge Maximum current transfer 95-240 Amp High current models





HIGH CURRENT ISOLATOR 240 AMP 3 Post Design Prevents primary battery discharge Maximum current transfer 95-240 Amp High current models



SPTE5131 EXPERT GROUND TERMINAL Accepts 0GA Wire

SPTE5131B BULK PACK (10 PC)



SPTE5134 EXPERT GROUND TERMINAL Accepts 4GA Wire





SPTE5138 EXPERT GROUND TERMINAL Accepts 8GA Wire

SPTE5138B BULK PACK (25 PC)

EXPERT GROUND TERMINAL KITS

SPTEFULLKIT	SPTE51KIT
1X SPTE5131B	1X SPTE5131B
1X SPTE5134B	1X SPTE5134B
1X SPTE51838B	1X SPTE51838B
3X SPTE5138	3X SPTE5138
3X SPTE5134	3X SPTE5134
3X SPTE5131	3X SPTE5131
1X SPTE312218	(77)
1X SPTE311210	
1X SPTE311614	
SPTE31KIT	
1X SPTE312218	
1X SPTE311210	



SPTE311210 EXPERT GROUND TERMINAL BULK PACK (50 PC) Accepts 12-10G & WE5131 EXPERT GROUND TERMINAL Accepts 0GA Wire



SPTE311614 EXPERT GROUND TERMINAL BULK PACK (100 PC) Accepts 16-14GA Wire

SPT5213

ground

TERMINAL 4GA

SHOC-KROME GROUND

Large surface area for solid

Dual mounting holes & tabs



SPTE312218 EXPERT GROUND TERMINAL BULK PACK (100 PC) Accepts 22-1GA Wire



SPT524 **RING TERMINAL** 4GA Input to 5/16" Ring

SPT520 **RING TERMINAL** 1/0GA Input to 5/16" Ring



SPT5212 SHOC-KROME GROUND TERMINAL 1/0GA Large surface area for solid ground Dual mounting holes & tabs

1X SPTE311614

TERMINALS / WIRE MANAGEMENT



RING TERMINAL 1/0GA, 5/16" Hole SPT5101: 2 Pack, (1) Red (1) Black SPT5101R: Bulk (25) Red SPT5101B: Bulk (25) Black



RING TERMINAL 4 GA, 5/16" Hole SPT5104: 4 Pack, (2) Red (2) Black SPT5104R: Bulk (25) Red SPT5104B: Bulk (25) Black



RING TERMINAL 4 GA, 1/4" Hole **SPT5144:** 4 Pack, (2) Red (2) Black



RING TERMINAL 8 GA, 5/16" Hole SPT5108: 4 Pack, (2) Red (2) Black SPT5108R: Bulk (25) Red SPT5108B: Bulk (25) Black



FORK TERMINAL 4GA Input with #10 Fork **SPT5124: 4** Pack, (2) Red (2) Black **SPT5124R:** Bulk (25) Red **SPT5124B:** Bulk (25) Black



FORK TERMINAL 8 GA Input with #8 Fork SPT5118: 4 Pack, (2) Red (2) Black SPT5118R: Bulk (25) Red SPT5118B: Bulk (25) Black



IW16PLUG BANANA PLUG (8) Red (8) Black Crimp Style



SPT5501 MONO BANANA PLUG 2 Pack Singer terminal Shoc-Krome, accepts up to 8GA



SPT5502 DUAL BANANA TERMINAL Accepts up to 8GA wire Red



SPT5503 DUAL BANANA TERMINAL Accepts up to 8GA wire Black



PG12 GROMMET 4GA 7/8" Mounting hole 4GA waterproof firewall bushing Watertight seal when power wires pass through metal Locks securely as bushing is tightened



PG34 GROMMET 1/0GA 1" Mounting hole 1/0GA waterproof firewall bushing Watertight seal when power wires pass through metal Locks securely as bushing is tightened



SPT5210 WIRE COUPLERS Joins 1/0GA Wire

SPT5211 WIRE COUPLERS Joins 4GA Wire



SPT521 GAUGE REDUCER 1/0GA Input to 4GA Pin





SWTOB WIRE MANAGEMENT CLIPS 1/0GA Wires



SWT4B WIRE MANAGEMENT CLIPS 4GA Wires

FUSES + FUSE MANAGEMENT



SGI20 RCA ADAPTER Female to female



SGI21 RCA ADAPTER Male to male



SGI22 RCA ADAPTER Right angle male to female



SHD201 ANL FUSE HOLDER (1) 1/0GA or 4GA Input /(1) 1/0GA or 4GA Output



SPD5201 ANL FUSE HOLDER Accepts any 5/16" Ring Terminal



SPD5202 ANL FUSE HOLDER (1) 4GA Input / (1) 4GA Output



SPD5203 ANL FUSE HOLDER (1) 1/0GA or 4GA Input / (1) 1/0GA or 4GA Output



SPD5204 ANL FUSE HOLDER (1) 0GA Input / (1) 0GA Output



SPD5210 ANL FUSE HOLDER (1) 1/0GA Input / (2) 4GA Outputs



SPD5212 ULTRA HIGH CURRENT ANL FUSE HOLDER (1) 1/0GA Input / (1) 1/0GA Output, Dual fused up to 600A



SHD801 MIDI FUSE HOLDER (1) 4GA or 8GA Input / (1) 4GA or 8GA Output



SPD5801 MIDI FUSE HOLDER (1) 4GA or 8GA Input / (1) 4GA or 8GA Output Removable base



SHD820 MIDI FUSE HOLDER (1) 1/0 Gauge or 4 Gauge input / (2) 4 Gauge or 8 Gauge outputs



SHD821 MIDI FUSE HOLDER (2) 1/0GA or 4GA Input / (4) 4GA or 8GA Output



SHD822 HIGH AMPERAGE MIDI FUSE HOLDER (1) 1/0G or 4GA Input / (1) 4GA or 8GA Output Dual MIDI fusing for up to 350 amps of current



SHD823 HIGH AMPERAGE MIDI FUSE HOLDER (2) 1/0G or 4GA Input / (2) 4GA or 8GA Output Dual MIDI fusing for up to 350 amps of current

FUSES + FUSE MANAGEMENT



SPD5601 MAXI FUSE HOLDER (1) 4GA or 8GA Input / (1) 4GA or 8GA Output Removable base



SFB1MAX MAXI FUSE HOLDER (BULK ONLY) (1) 4GA or 8GA Input / (1) 4GA or 8GA Output



SFB1MAXPT MAXI FUSE HOLDER (BULK ONLY) (1) 4GA or 8GA Input / (1) 4GA or 8GA Output



SPD5621 MAXI FUSE HOLDER (1) 1/0GA Input / (2) 4GA Outputs



SPD5622 MAXI FUSE HOLDER (1) 4GA Input / (2) 8GA Outputs



SPD5623 MAXI FUSE HOLDER (2) 1/0GA Inputs / (4) 4GA Outputs



SPD5625 MAXI FUSE HOLDER (2) 4GA Inputs / (4) 8GA Outputs



SPD5101 AGU FUSE HOLDER (1) 4GA or 8GA Input / (1) 4GA or 8GA Output Removable base



SPD5120 AGU FUSE HOLDER (1) 4GA Input / (2) 8GA Outputs



ANL Fuses (Each): SPF5260 60 Amp SPF5280 80 Amp SPF52100 100 Amp SPF52125 125 Amp SPF52150 150 Amp SPF52200 200 Amp SPF52250 200 Amp SPF522300 300 Amp



AGU Fuses (5 Pack): SPF5130 30 Amp SPF5140 40 Amp SPF5150 50 Amp SPF5160 60 Amp

Bulk Pack (20) SPF5160B 60 Amp SPF5180B 80 Amp

MAXI Fuses (3 Pack): SPF5620 20 Amp SPF5630 30 Amp SPF5640 40 Amp SPF5650 50 Amp SPF5660 60 Amp SPF5670 70 Amp SPF5680 80 Amp SPF56100 100 Amp



Bulk Pack (20) SPF5650B 50 Amp SPF5660B 60 Amp SPF5670B 70 Amp SPF5680B 80 Amp SPF56100B 100 Amp



MIDI / AFS Fuses (3 Pack): SPF5830 30 Amp SPF5840 40 Amp SPF5850 50 Amp SPF5860 60 Amp SPF5870 70 Amp SPF5880 80 Amp SPF58100 100 Amp SPF58125 125 Amp SPF58150 150 Amp SPF58175 175 Amp

CIRCUIT BREAKERS / DISTRIBUTION BLOCKS



CIRCUIT BREAKERS Accepts 1/0GA or 4GA Wire SGP90300 = 300 Amp SGP90250 = 250 Amp SGP90200 = 200 Amp SGP901501 = 150 Amp SGP901351 = 135 Amp SGP901001 = 100 Amp

Easy Reset / Disconnect Ultimate Circuit Protection Not for constant current applications



CIRCUIT BREAKERS Accepts 4GA or 8GA Wire **SGP90801** = 80 Amp **SGP90501** = 50 Amp

Easy Reset / Disconnect Ultimate Circuit Protection Not for constant current applications



MARINE CIRCUIT BREAKERS **SCBM150** = 150 Amp **SCBM100** = 100 Amp Ultimate Circuit Protection Easy Reset / Disconnect Accepts 5/16 Ring Terminals



SHD20 DISTRIBUTION BLOCK (1) 1/0GA or 4GA Input / (2) 4GA or 8GA Outputs



SPD570 DISTRIBUTION BLOCK (1) 4GA or 8GA Inputs for Power and Ground (2) 4GA or 8GA Outputs for Power and Ground



SHD21 DISTRIBUTION BLOCK (2) 1/0GA or 4GA Inputs / (4) 4GA or 8GA Outputs



SPD514 DISTRIBUTION BLOCK (2) 1/0GA Inputs /(4) 4GA Outputs



SPD513 DISTRIBUTION BLOCK (2) 4GA Inputs /(4) 8GA Outputs



SPD515 DISTRIBUTION BLOCK (1) 1/0GA Input /Output / (3) 4GA Input/Output



SPD510 DISTRIBUTION BLOCK 3 Way 8GA IN / OUT



SPD511 4GA Input / 4 GA Output Distribution T-Block



SPD512 1/0GA Input / 1/0GA Output Distribution T-Block

POWER INVERTERS



SPI1000

- · 1000W Nominal
- · 2000W Surge
- · 3 Outlets
- · H 2 5/8" x L 11" x W 6"
- · Overload and Short Circuit Protection
- High Surge Output for Large Devices
 Audible Low Voltage Alarm and Auto Shutdown
- · Temperature Regulated Cooling Fan



SPI500

- · 500W Nominal
- · 1000W Surge
- · 3 Outlets
- · H 2 5/8" x L 8.5" x W 6"
- · Overload and Short Circuit Protection
- · High Surge Output for Large Devices
- · Audible Low Voltage Alarm and Auto Shutdown
- Temperature Regulated Cooling Fan



SPI300

- · 300W Nominal
- · 600W Surge
- · Dual Outlets
- · H 1 7/8" x L 7 1/8" x W 4"
- · Overload and Short Circuit Protection
- High Surge Output for Large Devices
- Audible Low Voltage Alarm and Auto Shutdown
- · Temperature Regulated Cooling Fan



SPI160

- · 160W Nominal
- · 300W Surge
- · Single Outlets
- · H 1 7/8" x L 5 3/8" x W 4"
- · Overload and Short Circuit Protection
- High Surge Output for Large Devices
- · Audible Low Voltage Alarm and Auto Shutdown
- · Temperature Regulated Cooling Fan

FANS + SIGNAL ADAPTERS



SGPV2 GAME PLATE

- Easy Connection of A/V+ Power
- Left and Right Audio, Video
 Perfect Addition for SPI1000, SPI500, SPI300 or SPI160
- Great for X-Box or PlayStation



SGP12

- VOLT. METER/CHARGER · High Visibility LED Voltage
- Meter · USB Charger
- · 12 Volt Plug
- Monitor Alternator
- Performance



SVMB

- VOLT. GAUGE · High Visibility LED Display
- High Visibility LED Display
 Auto ON/OFF
- Auto ON/O
- Simple Three Wire Installation
- Flush or Surface Mountable
- · H 5/8" x L 2 1/4" x W 1 5/8"



SVMR

- VOLT. GAUGE
- \cdot High Visibility LED Display
- · Auto ON/OFF
- \cdot Simple Three Wire Installation
- · Flush or Surface Mountable
- · H 5/8" x L 2 1/4" x W 1 5/8"



SGN141

ADJUSTABLE LINE OUTPUT

- CONVERTER W/ REMOTE • 55 Watts per Ch Input / Adjustable Stereo Gain
- RCA or Speaker Level Input / Output
 Use to Add Aftermarket Amp or Keep Factory
- Amplified System
- Auto Sense Remote Output
- · Converts Speaker Wires to RCA
- · D.C. Isolation for Noise Reduction
- · High Power Models up to 55 watts
- Precision Stereo Gain Adjustments



SGN121

- FIXED LINE OUTPUT CONVERTER
- · 55 Watts per Ch Input
- Converts Speaker Wires to RCA
 D.C. Isolation for Noise Reduction
- High Power Models up to 55 watts
- · High Fower Models up to 55 watt



SGN111

- FIXED LINE OUTPUT CONVERTER
- · 35 Watts per Ch Input
- Converts Speaker Wires to RCA
- D.C. Isolation for Noise
- Reduction
- High Power Models up to 55 watts



SGN201

- GROUND LOOP ISOLATOR
- \cdot Reversible Inputs for Use at
- Amplifier or Radio Great for Auxillary Inputs
- 3.5mm to 3.5mm
- · Reduces Unwanted Noise
- \cdot Retains Sound Quality
- Full 20Hz-20kHz Audio Transformer Technology
- Female / Male
 PCA lapute (PCA Output
- RCA Inputs / RCA Outputs or 3.5mm to 3.5mm



SGJ78

- 8-1/4" CROSS FLOW FAN
- · Draw .19A/Flow 54CFM
- · Sound Level dBA35
- Easy Installation
- · Low Profile Design with High Flow



SGJ76

- 5" CROSS FLOW FAN
- Draw .22A/Flow 43CFM- Sound Level dBA35
- · Easy Installation
- · Low Profile Design with High Flow



SGJ34 5" SQUARE FAN Draw .6A/Flow 105CFM



SGJ32 2.5" SQUARE FAN Draw 13A/Flow 23CFM

TEXTILES

CARPET MULTI-PILE

40" wide, 50 yd full roll o<u>r 5 yd mini roll</u>




Parchment

Charcoal

SMBLK Black

TRUNK LINER

54" wide, 50 yd full roll or cut in 5 yd increments

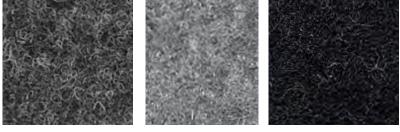


STLCHAR Charcoa

STLHCHAR Heather Charcoal STLBLK Black

ENSEMBLE MULTI-PILE

72" wide, 50 yd full roll or cut in 5 yd increments (latex backed)



SECHAR Charcoal



SEBLK Black

VINYL/SUEDE CARBON FIBER SERIES 54" wide, cut to order



CVFQUICKSILVER Silver



Black

MONTE CARLO SERIES (FINE GRAIN TEXTURE) 54" wide, 50 yd full roll or cut in 5 yd increments



MCVMMANTB



MIAMI SERIES (WIDER GRAIN TEXTURE)

54" wide, 50 yd full roll or cut in 5 yd increments (latex backed)



MIVGREY Dark Gev



MIVHMOONL Light Grey



Tan



MIVAWHT White

COMFORT SUEDE

54" wide, 50 yd full roll or cut in 5 yd increments



CSUEDEONYX Onix

CSUEDECHAR Charcoal



CSUEDEGREY Grey



STINGER SELECT

Our entry line of high performance audio accessories, Stinger Select, allows customers at any price point to enjoy the benefits of Stinger quality and solutions.

THE STINGER SELECT LINEUP

- Interconnects
 - CCA Wiring Kits
- Copper Wiring Kits
 Wire

Stater

- WireBatteries
 - Hardware Electronics
 - **Enclosures**

STINGER SELECT INTERCONNECTS

COMPETITION SERIES

Stinger Select Competition Series interconnects offer excellent sound quality and noise rejection for balanced systems. Tightly twisted and flexible construction with corrosion resistant chrome plated ends. Multiple lengths and Y-connectors available.

PART #	LENGTH	ТҮРЕ
SSRCB1.5	1.5FT/0.5m	Twisted RCA Pair M2M
SSRCB3	3Ft/0.9m	Twisted RCA Pair M2M
SSRCB6	6Ft/1.8m	Twisted RCA Pair M2M
SSRCB12	12Ft/3.7m	Twisted RCA Pair M2M
SSRCB15	15Ft/4.6m	Twisted RCA Pair M2M
SSRCB17	17Ft/5.2m	Twisted RCA Pair M2M
SSRCB20	20Ft/6m	Twisted RCA Pair M2M
SSRCB2F		2 Female 1 Male
SSRCB2M		2 Male 1 Female



PERFORMANCE SERIES

Stinger Select Performance Series Coaxial interconnects offer excellent sound quality for unbalanced systems. Reliable CoAxial construction with corrosion resistant chrome plated ends. Multiple lengths and Y-connectors available.

PART #	LENGTH	ТҮРЕ
SSPRCA1.5	1.5FT/0.5m	Coaxial RCA M2M
SSPRCA3	3Ft/0.9m	Coaxial RCA M2M
SSPRCA6	6Ft/1.8m	Coaxial RCA M2M
SSPRCA9	9Ft/2.7m	Coaxial RCA M2M
SSPRCA12	12Ft/3.7m	Coaxial RCA M2M
SSPRCA17	17Ft/5.2m	Coaxial RCA M2M
SSPRCA20	20Ft/6m	Coaxial RCA M2M
SSPRCA2F		2 Female 1 Male
SSPRCA2M		2 Male 1 Female



BULK (25/PACK) Stinger Select Bulk Coaxial interconnects offer quality on a budget. Reliable CoAxial construction with corrosion resistant gold plated ends. Multiple lengths and Y-connectors available.

PART #	LENGTH	TYPE
SSIB3	3Ft/0.9m	Coaxial RCA M2M
SSIB6	6Ft/1.8m	Coaxial RCA M2M
SSIB12	12Ft/3.7m	Coaxial RCA M2M
SSIB17	17Ft/5.2m	Coaxial RCA M2M
SSIB20	20Ft/6m	Coaxial RCA M2M
SSIBY2F		2 Female 1 Male
SSIBY2M		2 Male 1 Female



INTERCONNECTS

COMPETITION SERIES



 \cdot Split Tip Center Pin

- Flexible Jacket
- \cdot RCA Twisted Pair Male to Male

SSRCB1.5 · 1.5FT/0.5m

SSRCB3 · 3Ft/0.9m

SSRCB6 · 6Ft/1.8m

SSRCB12 · 12Ft/3.7m

· 2 Female to 1 Male Split

SSRCB2F

· Twisted Pair

· Split Tip Center Pin

· Flexible Jacket

· Mini ends

SSRCB15 · 15Ft/4.6m

SSRCB17

· 17Ft/5.2m

SSRCB20 · 20Ft/6m

COMPETITION SERIES

COMPETITION SERIES



PERFORMANCE SERIES

PERFORMANCE SERIES

- · Split Tip
- Flexible Jacket
- · RCA Male to Male
- · CoAxial Construction



SSPRCA1.5 · 1.5FT/0.5m

ssprca3 · 3Ft/0.9m

SSPRCA6 · 6Ft/1.8m

SSPRCA9 · 9Ft/2.7m SSPRCA12 · 12Ft/3.7m

SSPRCA17 · 17Ft/5.2m

SSPRCA20 · 20Ft/6m





SSPRCA2F

- \cdot 2 Female to 1 Male Split
- CoAxial construction
- Mini ends
- · Split Tip Center Pin
- Flexible Jacket



PERFORMANCE SERIES

SSPRCA2M

SSRCB2M

· Twisted Pair

· Mini ends

· 2 Male to 1 Female Split

· Split Tip Center Pin

· Flexible Jacket

- 2 Male to 1 Female Split
- \cdot CoAxial construction
- Mini ends
- Split Tip Center Pin
- Flexible Jacket

INTERCONNECTS BULK + CCA WIRING KITS



SSKO

1/0GA 1500W Complete Wiring Kit

- · 17Ft/5.2mMatte Blue Ultra Flexible Power Wire (CCA)
- \cdot 3Ft/0.9m Matte Gray Ultra Flexible Ground Wire (CCA)
- 17Ft/5.2m Twisted Pair RCA Interconnects (OFC)
- \cdot 17Ft/5.2m Blue Remote Turn-on Wire (CCA)
- \cdot 1pc. High Current ANL Fuseholder with 150A Fuse



SSK4ANL

- 4GA 1000W Complete Wiring Kit
- \cdot 17Ft/5.2m Matte Blue Ultra Flexible Power Wire (CCA)
- \cdot 3Ft/0.9m Matte Gray Ultra Flexible Ground Wire (CCA)
- · 17Ft/5.2m Twisted Pair RCA Interconnects (OFC)
- \cdot 17Ft/5.2m Blue Remote Turn-on Wire (CCA)
- · 20Ft/6m Matte Blue Ultra Flexible Speaker Wire (CCA)
- 1pc. High Current ANL Fuseholder with 100A Fuse

SSK8

8GA 600W Complete Wiring Kit

- · 17Ft/5.2m Matte Blue Ultra Flexible Power Wire (CCA)
- \cdot 3Ft/0.9m Matte Gray Ultra Flexible Ground Wire (CCA)
- 17Ft/5.2m Twisted Pair RCA Interconnects (OFC)
- \cdot 17Ft/5.2m Blue Remote Turn-on Wire (CCA)
- 20Ft/6m Matte Blue Ultra Flexible Speaker Wire (CCA)
- \cdot 1pc. High Current Water-resistant MIDI Fuseholder with 60A Fuse



NAMA



COPPER WIRING KITS

SS2400XS

1/0GA Copper 2400W Complete Wiring Kit

- · 17Ft/5.2m Translucent Blue Power Wire
- · 17Ft/5.2m Translucent Blue Twisted Pair RCA Interconnects
- · 3Ft/0.9m Translucent Silver Ground Wire
- · 1pc Satin Plated Battery Terminal
- · 16Ft/4.9m Blue Remote Turn-on Wire
- \cdot 1pc ANL Fuseholder
- · 250A ANL Fuse



SS1200XS

4GA Copper 1200W Complete Wiring Kit

- · 17Ft/5.2m Translucent Blue Power Wire
- · 3Ft/0.9m Translucent Silver Ground Wire
- · 17Ft/5.2m Translucent Blue Twisted Pair RCA interconnects
- · 3Ft/0.9m Black flex loom tubing
- · 16Ft/4.9m Blue Remote Turn-on Wire
- · 20Ft/6m Translucent Speaker Wire
- 1pc ANL Fuseholder
- 100A ANL Fuse





8GA Copper 600W Complete Wiring Kit

- · 117Ft/5.2m Translucent Blue Power Wire
- · 3Ft/0.9m Translucent Silver Ground Wire
- · 17Ft/5.2m Translucent Blue Twisted Pair RCA Interconnects
- · 3Ft/0.9m Black flex loom tubing
- · 16Ft/4.9m Blue Remote Turn-on Wire
- · 20Ft/6m Translucent Speaker Wire
- · 1pc AGU Fuseholder
- · 60A AGU Fuse



SS300XS

10GA Copper 300W Complete Wiring Kit

- 17Ft/5.2m Translucent Blue Power Wire
- \cdot 3Ft/0.9m Translucent Silver Ground Wire
- · 17Ft/5.2m Translucent Blue Twisted Pair RCA Interconnects
- · 3Ft/0.9m Black flex loom tubing
- \cdot 16Ft/4.9m Blue Remote Turn-on Wire
- \cdot 20Ft/6m Translucent Speaker Wire
- · 1pc ATC Fuseholder
- \cdot 30A ATC Fuse





POWER WIRE



- - Soft PVC Insulation
 - · Heat Resistance
 - 250Ft/76.2m Roll

0GA POWER WIRE

- 8GA POWER WIRE
- · Vinyl Matte Red
- · Soft PVC Insulation
- · Heat Resistance
- 250Ft/76.2m/76.2m Roll
- · Vinyl Matte Red
- · Soft PVC Insulation
- · Heat Resistance
- · 250Ft/76.2m Roll

SPEAKER WIRE

12GA

WIRE

16GA

WIRE



18GA **SPEAKER** WIRE

- - · Vinyl Black
 - · 1000Ft/304.8m Roll
- · 1000Ft/304.8m Roll

PRIMARY WIRE



- · 500Ft/152.4m Roll
- · 500Ft/152.4m Roll
- 500Ft/152.4m Roll
- · 500Ft/152.4m Roll








SSPW18BR 18GA Brown SS Primary Wire

- · Multi-Strand CCA
- Conductors · Flexible PVC Jacket
- · 500Ft/152.4m Roll

BATTERIES / CAPACITORS / TERMINALS

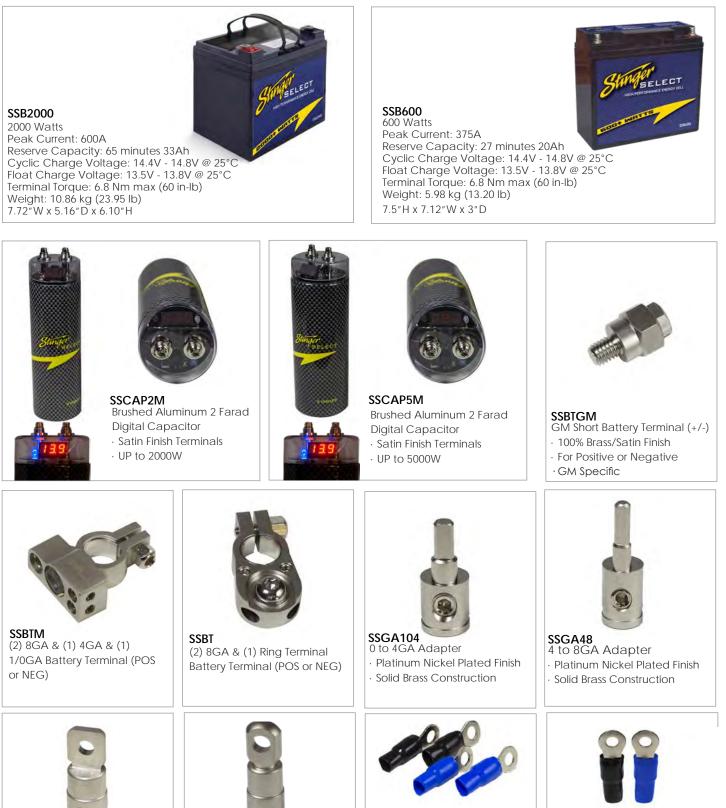

SSRT4

4GA Ring Terminal

Crimp Style

· Black or Blue

4 Pack

· 100% Brass/Satin Finish

· 5/16-Inch Mounting Hole

SSRTO

1/0GA Ring Terminal

- · 100% Brass/Satin Finish
- · 5/16-Inch Mounting Hole Crimp Style
- · Black or Blue
- · 2 Pack

SSPR4 4GA Ring Terminal · 5/16-Inch Mounting Hole Set Screw

SSPRO

Set Screw

1/0 GA Ring Terminal

· 5/16-Inch Mounting Hole

FUSES / FUSE MANAGEMENT



SSFANL 1/0 or 4GA ANL Fuseholder · 100% Brass/Satin Finish



SSFANLW 1/0 or 4GA Water-resistance ANL Fuseholder • 100% Brass/Satin Finish

· Water-resistant



SSFDB024 (1) 1/0GA Input (2) 4GA Output High Power MIDI Fuse block · 100% Brass/Satin Finish



4 or 8GA MIDI Inline Fuse Holder • 100% Brass/Satin Finish



SSDB024 Distribution Block • 100% Brass/Satin Finish • (1) 1/0GA Input • (2) 4GA Output



SSDB2034 Distribution Block · 100% Brass/Satin Finish · (2) 1/0GA Input

· (3) 4GA Output



SSDB448 Distribution Block • 100% Brass/Satin Finish • (1) 4GA Input • (4) 8GA Output



Distribution Block 100% Brass/Satin Finish (1) 4GA Input (2) 8GA Output MIDI fuse



SSFDBA428 Distribution Block · 100% Brass/Satin Finish · (1) 4GA Input · (2) 8GA Output

· AGU fuse



SSVLBTP Positive Battery Terminal (1) 1/0GA & (1) 4GA & (2) 8GA Outputs



SSVLBTN Negative Battery Terminal (1) 1/0GA & (1) 4GA & (2) 8GA Outputs



SSVLD48 Distribution Block · (1) 4GA Input/Output

- · (4) 8GA Inputs/Outputs
- · Satin Silver Finish



SSFAGU 4 or 8GA AGU Fuseholder • 100% Brass/Satin Finish

· Water-resistant



SSAFHS ANL Fuseholder

- Includes snap off cover for quick access to fuse
 Accepts ANL style fuses
- (not included) from 60A to 300A)

• Corrosion Resistant Matte Satin Finish



SSVLANL 1/0 or 4GA ANL Fuseholder • Satin Silver Finish



SSVLANL2 1/0 or 4GA Water-resistance ANL Fuseholder • Satin Silver Finish • Water-resistant

FUSES / CIRCUIT BREAKERS



SSVLAGU 4 or 8GA AGU FUSE HOLDER



PACKAGED ANL FUSES 1/PACK

SSANL80S 80A ANL Fuse · Satin Finish

SSANL100S 100A ANL Fuse · Satin Finish

SSANL120S 120A ANL Fuse · Satin Finish

SSANL300S 150A ANL Fuse 300A ANL Fuse · Satin Finish

200A ANL Fuse Satin Finish

SSANL250S 250A ANL Fuse · Satin Finish

SSANL150S

· Satin Finish

SSANL200S



PACKAGED AGU FUSES 5/PACK

SSAGU40S 40A AGU Fuse Satin Finish

SSAGU70S 70A AGU Fuse · Satin Finish

SSAGU80S SSAGU50S 80A AGU Fuse 50A AGU Fuse Satin Finish · Satin Finish

SSAGU60S 60A AGU Fuse · Satin Finish

ANL FUSES BULK

SSANL80BULK · 80A ANL Fuse Bulk (10/Pack)

SSANL200BULK · 200A ANL Fuse Bulk (10/Pack)

SSANL100BULK · 100A ANL Fuse Bulk (10/Pack)

SSANL150BULK · 150A ANL Fuse Bulk (10/Pack)

SSANL250BULK · 250A ANL Fuse Bulk (10/Pack)

> SSANL300BULK · 300A ANL Fuse Bulk (10/Pack)



MIDI FUSES BULK 10/Pack SSMIDI30B · 30A MIDI Fuse Bulk

SSMIDI40B

SSMIDI70B · 70A MIDI Fuse Bulk

SSMID180B · 80A MIDI Fuse Bulk · 40A MIDI Fuse Bulk

SSMIDI100B SSMIDI50B · 100A MIDI Fuse Bulk · 50AMIDI Fuse Bulk

SSMIDI60B · 60A MIDI Fuse Bulk SSMIDI125B · 125A MIDI Fuse Bulk

SSMIDI150B · 150A MIDI Fuse Bulk







SSCB200 200A Circuit Breaker · Manual Trip Reset

· High Current Protection



SSCB300 300A Circuit Breaker · Manual Trip Reset · High Current Protection

SSCB100 100A Circuit Breaker · Manual trip reset

· High Current Protection



SSCB150 150A Circuit Breaker · Manual Trip Reset

· High Current Protection



ENCLOSURES



- SSGLI
- Ground Loop Isolator • Excellent at reducing most
 - noise in RCA signal paths
- Utilizes proprietary audio transformers for a 1.3dB gain



SSLC Remote Level Controller

- · Adjustable RCA Line Level Control
- · Female RCA Input and Output



SSLOC2 2 Channel Line Output Converter

- 10 ohm Input impedance and 10k ohm Output impedance
 Adjustable attenuation for
- proper balance on both



SSLOC35 2 Channel Line Output Converter • 10 ohm Input impedance and 10k ohm Output impedance

Adjustable attenuation for

proper balance on both channels

ENCLOSURES





6X9 Truck Speaker Enclosure

- · Truck style 12" H x 3 1/2" D (top) 5" D (bottom) x 8 1/4"
- · Quick connection terminal cups
- · Front loading speaker cutouts
- · Enclosures are retail boxed for convenience
- \cdot Universal charcoal colored carpeting goes well with many interiors





STINGER SPECIALTY VEHICLES

Amazing sound isn't just for cars. With Stinger you can achieve musical realism on the go, no matter what moves you. Enhance your adventure with Stinger for marine, power sports, and V-twins.

Solutions include speakers, subs, amps and the accessories to help simplify the installation.



STINGER **V-TWIN ACCESSORIES** Stinger R 6.00 · Otherat 3/

V-TWIN

SPX925-HD HARLEY-DAVIDSON DIRECT REPLACEMENT BATTERY

- ▶ Watts: 1850+
- CCA: 410A
- Peak Discharge: 2400+ Amps
- 5 Second Cranking Amps: 925A
- Internal Resistance: <5.0 mOhms</p>
- 🕨 28Ah
- 3 Year Full Replacement Warranty
- Maintains charge for one year while in storage (if fully charged before storage) so you're always ready to ride

Dimensions:

- (4.92" H x 6.93" W x 6.50" L)
- (125.5mmH x 176mmW x 165mmL)
- Weight: 23.59lbs / 10.70kg
- Replaces the following batteries: 66010-97C, 66010-97B, 66010-97A, 66010-97

SVTRKSG1 + SVTRKRG1 PRE-CUT FAIRING DAMPING KITS

Pre-cut for the perfect fit with:

- > 1998-2013 Harley-Davidson Ultra Classic Street Glide (SVTRKSG1) or
- > 1998-2013 Harley-Davidson Road Glide (SVTRKRG1) fairings

FEATURES:

- Improved Sound: Optimized bass response and increased amplifier output, annoying squeaks, rattles, and vibrations are absorbed delivering superior sound reproduction
- Excellent Insulation: Kills composite panel resonance, while increasing audio volume and improving overall frequency response
- Simplified Installation: Pre-cut to fit the fairing perfectly, the initial tackiness allows for easy application, no surface prep needed
- High temperature resistance up to 400°
- 3 Layers of proprietary damping materials for superior performance: acoustic foam, aluminum, and an ultra-dense butyl blend







SPX700X4 4-CHANNEL 700W POWER SPORTS AMPLIFIER



- 300x2 at 4 Ohms Bridged 175x4 at 2 Ohms 125x2 at 4 Ohms
- Dimensions: 11.5" L x 4.7" W x 1.6" H
- ▶ Full Range Class D
- Mounting feet
- External volume knob with MUTE
- Aux RCA output (to link to additional amplifiers)
- Unregulated power supply

SPX350X2 2-CHANNEL 350W POWER SPORTS AMPLIFIER



- 350x1 at 4 Ohms 175x2 at 2 Ohms 100x2 at 4 Ohms
- Dimensions: 4.72" L x 5.11" W x 1.6" H
- Full Range Class D
- Mounting feet
- External volume knob with MUTE
- Aux RCA output (to link to additional amplifiers)
- Unregulated power supply

Add Bluetooth with iSimple ISBT23 Weather-resistant Bluetooth Receiver



Plug-and-Play for 1998 and up Harley-Davidson Touring Motorcycles

- Pre-cut and loomed power/ ground & speaker wire harnesses
- Direct fit wiring and fusing with pre-terminated ends with Ferrule connectors
- Includes OEM connections for interfacing with 2014- up models
- Works on Street/Electra Glide and Road Glide models
- 8GA OFC power and ground
- 16GA speaker wire
- ▶ 60 amp MAXI fuse



HDK001X (PAC) RADIO REPLACEMENT KIT WITH FAIRING CONTROL RETENTION



Designed for select 1998-2013 Harley-Davidsons (FL models with factory fairings) and includes a pre-programmed interface to retain the factory handle bar audio controls, pre-wired installation harness (requires no cutting of any factory wires), two options of frames for the aftermarket radio installation.

BKHDK001 RADIO REPLACEMENT KIT



SINGLE DIN w/ Optional Splash Cover for 1998-2013 HARLEY DAVIDSON

Flip up cover for protection while allowing for easy access

BKHSB200 (BESTKITS) SPEAKER ADAPTERS



Harley-Davidson Speaker Adapters for 1998-2013 Touring Models

Allows installation of 6.5" speakers to factory location



STINGER MARINE AUDIO + ACCESSORIES



MARINE

MARINE SPEAKERS

UV TESTED Exceeds industry standards for years of durability SALT & FOG TESTED Battle the harshest elements PRECISION NON-CORROSIVE TERMINALS Create a solid connection in any environment



MARINE SUBWOOFERS

UV TESTED Exceeds industry standards for years of durability SALT & FOG TESTED Battle the harshest elements PRECISION NON-CORROSIVE TERMINALS Create a solid connection in any environment



MARINE

MARINE AMPLIFIERS



MARINE COMPLETE AMPLIFIER INSTALLATION KIT

- Power Wiring Kit utilizing Marine grade jacket. True Copper for current transfer and tinned conductors for reliability in the harsh marine environment
- Industry first Siamese Pair dual power and ground wire
- High Strand Count OFC Hyper-Twist Tinned Conductors
- Highest Marine Grade Type III BC5W2 Compliant Marine PVC Jacket,1050C Dry, 750C wet, Salt, Fog, Oil, Water resistant Exceeds UL1426 Marine Standards
- Element resistant MIDI fuse holder



- **SEA4247** 4GA 7 meter / 23 feet / 80 amp MIDI fuse
- SEA4243 4GA 3 meter / 9.8 feet / 175 amp MIDI fuse
- SEA4287 8GA 7 meter / 23 feet / 40 amp MIDI fuse
- SEA4283 8GA 3 meter / 9.8 feet / 80 amp MIDI fuse



MARINE

MARINE BATTERIES



SMRAUX: 21" / 0.5m

- Splash-Proof Cover
- Easy and Secure Mounting with Threaded Body
- Corrosion-Resistant Plated 3.5mm Audio Jack
- Flexible Marine-Grade PVC Jacket



3.5mm Audio Input to Male RCA & USB 3.0 SMRAUXUSB3: 21" / 0.5m

- Splash-Proof Cover
- Easy and Secure Mounting with Threaded Body
- Ultra High Speed USB 3.0
- Corrosion Resistant Plated Flexible Marine-Grade
 PVC Jacket







S12023

HIGH CURRENT ISOLATOR 120 AMP 4 Post Design Prevents primary battery discharge Maximum current transfer 95-240 Amp High current models

S2402

HIGH CURRENT ISOLATOR 240 AMP 3 Post Design Prevents primary battery discharge Maximum current transfer 95-240 Amp High current models



SPR200

DUAL BATTERY ISLATOR AND MONITOR

Consists of a BG12 battery guard and a PAC-200 relay. Designed to isolate the primary battery from the secondary battery, protect the user from battery failure and prolong their battery's lifespan



MARINE CIRCUIT BREAKERS SCBM150 = 150 Amp **SCBM100** = 100 Amp Ultimate Circuit Protection Easy Reset / Disconnect Accepts 5/16 Ring Terminals Spark free design



HSBR 20-18GA Heat Shrink Butt Connectors 3M T-Tap3M Perma-Seal, heat shrink ends lined w/ adhesive to create a Seal bond.



HSBB 16-14GA Heat Shrink Butt Connectors 3M T-Tap3M Perma-Seal, heat shrink ends lined w/ adhesive to create a Seal bond.

POWFR WIRF



1/0GA

SHW10B (50Ft/15.2m Roll): Blue SHW10G (50Ft/15.2mRoll): Gray SHW10C (50Ft/15.2m Roll): Clear SPW10TR (50Ft/15.2m Roll): Matte Red SPW10TB (50Ft/15.2m Roll): Matte Black

4GA

SHW14B20 (20Ft/6.1m Blister): Blue SHW14C7 (7Ft/2.1m Blister): Clear SHW14B (100Ft/30.5m Roll): Blue SHW14G (100Ft/30.5m Roll): Gray SHW14C (100Ft/30.5m Roll): Clear SPW14TR (100Ft/30.5m Roll): Matte Red SPW14TB (100Ft/30.5m Roll): Matte Black SPW14TR250 (250Ft/76.2m Roll): Matte Red SPW14TB250 (250Ft/76.2m Roll): Matte Black

Fulling 12-

HSBY

12-10GA Heat Shrink Butt Connectors 3M T-Tap3M Perma-Seal, heat shrink ends lined w/ adhesive to create a Seal bond.



ATC-STYLE FUSE BLOCKS ATCFB6= 6-way **ATCFB12** = 12-way

8GA

SHW18B20 (20Ft/6.1m Blister): Blue SHW18C7 (7Ft/2.1m Blister): Clear SHW18B (250Ft/76.2m Roll): Blue SHW18G (250Ft/76.2m Roll): Gray SHW18C (250Ft/76.2m Roll): Clear SPW18TR (250Ft/76.2m Roll): Matte Red SPW18TB (250Ft/76.2m Roll): Matte Black SPW18TR500 (500Ft/152.4m Roll): Matte Red SPW18TB500 (500Ft/152.4m Roll): Matte Black

10GA

SPW110TR (250Ft/76.2m Roll): Matte Red SPW110TR500 (500Ft/152.4m. Roll): Matte Red SPW110TB (250Ft/76.2m Roll): Matte Black SPW110TB500 (500Ft/152.4m. Roll): Matte Black

SPEAKER WIRE



10 GA

SHW510G (50 Ft Roll): Gray

12 GA

SPW512BK(250Ft/76.2m Roll): Black SPW512B (100Ft/30.5m Roll): Blue SPW512B250 (250Ft/76.2m Roll): Blue SHW512G (100Ft/30.5m Roll): Gray SHW512G250 (250Ft/76.2m Roll): Gray

14GA

SHW514B15 (15Ft/4.6m Blister): Blue SPW514BK (500Ft/152.4m Roll): Black

16 GA

SHW516B50 (50Ft/15.2m Blister): Blue SHW516B (250Ft/76.2m Roll): Blue

16 GA Cont'd

SHW516B500 (500Ft/152.4m Roll): Blue SHW516G (250Ft/76.2m Roll):Gray SHW516G500 (500Ft/152.4m Roll): Gray SPW516GY (500Ft/152.4m Roll): Gray SPW516BK (500Ft/152.4m Roll): Black SPW516WH (500Ft/152.4m Roll):White SPW516RB (1000Ft/304.8m Roll): Red / Black SPW516C500 (500Ft/152.4m Roll): Clear SPW516C (1000Ft/304.8m Roll): Clear

18 GA

SPW518BK1 (1000Ft/304.8m Roll): Black SPW518C(1000Ft/304.8m Roll): Clear

20 GA

SPW520RB (500Ft/152.4m Roll): Red/Black



The flexible base of PCAM-BS1 makes its mounting options limitless. Add extra visibility to your boat where you need it and make maneuvering through the ocean or lake easier and safer. Keep an eye on a water skier, tuber or just eliminate blind spots around your boat.

Key Features:

- Sensor Type: 1/4" CMOS
- Min. illumination (LUX): 0.1
- Viewing Angle: 80°
- Water/debris-proof Rating: IP67
- Image (Mirrored/Non-mirrored): Selectable



POWER SPORTS AUDIO + ACCESSORIES


R

Sinder

POWER SPORTS

POWER SPORTS SPEAKERS

UV TESTED Exceeds industry standards for years of durability SALT & FOG TESTED Battle the harshest elements PRECISION NON-CORROSIVE TERMINALS Create a solid connection in any environment

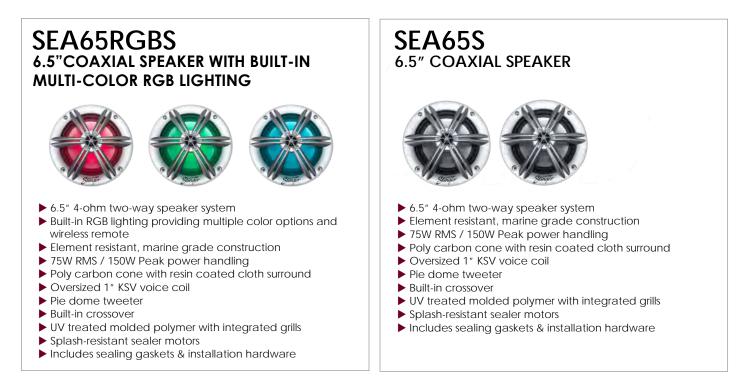

POWER SPORTS SUBWOOFERS

UV TESTED Exceeds industry standards for years of durability SALT & FOG TESTED Battle the harshest elements

PRECISION NON-CORROSIVE TERMINALS Create a solid connection in any environment



POWER SPORTS

POWER SPORTS AMPLIFIERS

SPX700X4 4 CHANNEL 700W POWER SPORTS AMPLIFIER Strugger

- ▶ 300x2 at 4 Ohms Bridged 175x4 at 2 Ohms 125x4 at 4 Ohms
- Dimensions: 11.5" L x 4.7" W x 1.6" H
- Full Range Class D
- Mounting feet
- External volume knob with MUTE
- Aux RCA output (to link to additional amplifiers)
- Unregulated power supply

POWER SPORTS BATTERIES



SPXRZRBAT2 SECOND BATTERY INSTALLATION KIT FOR 2014+ POLARIS RZR

- OEM style battery bracket with hardware
- 200 Amp pre-wired isolator relay
- 90° RZR battery terminals
- Compatible with 2-seat and 4-seat models

NOTE: Requires SPX925 Sold Separately



- 350x1 at 4 Ohms 175x2 at 2 Ohms 100x2 at 4 Ohms
- Dimensions: 4.72" L x 5.11" W x 1.6" H
- Full Range Class D
- Mounting feet
- External volume knob with MUTE
- Aux RCA output (to link to additional amplifiers)
- Unregulated power supply

POWER SPORTS

SPXRZR4242 UNIVERSAL 2/4 CHANNEL AMP INSTALLATION KIT FOR OFF-ROAD VEHICLES Plug-and-Play for 2014+ Polaris RZR

- ▶ Kit Includes under dash amplifier mounting bracket
- ▶ Pre-cut and loomed power/ ground & speaker wire harnesses
- ▶ Fusing and pre-terminated wiring
- Compatible with 2-seat and 4-seat models
- ▶4GA into dual 8GA power / ground wire
- ▶16GA speaker wire
- ▶150 amp MIDI fuse



2 Channel Interconnects SMRCA2: 2 Meters SMRCA4: 4 Meters SMRCA6: 6 Meters

> Corrosion Resistant Nickel Plating Precision High Rate Twisted-Pair Conductors Flexible Marine-Grade PVC Jacket Tinned OFC Copper Conductors

3.5mm Audio Input to Female RCA SMRAUX: 21"

- Splash-Proof Cover
- Easy and Secure Mounting with Threaded Body
- Corrosion Resistant Plated 3.5mm Audio Jack
- Flexible Marine Grade PVC Jacket



3.5mm Audio Input to Female RCA & USB 3.0 SMRAUXUSB3: 21"

- Splash-Proof Cover
- Easy and Secure Mounting with Threaded Body
- Ultra High Speed USB3
- Corrosion Resistant Plated Flexible Marine Grade
- PVC Jacket





S12023

HIGH CURRENT ISOLATOR 120 AMP 4 Post Design Prevents primary battery discharge Maximum current transfer 95-240 Amp High current models



S2402 HIGH CURRENT ISOLATOR 240 AMP 3 Post Design Prevents primary battery discharge Maximum current transfer 95-240 Amp High current models



Ultimate Circuit Protection Easy Reset / Disconnect Accepts 5/16 Ring Terminals MARINE CIRCUIT BREAKERS SCBM150 = 150 Amp SCBM100 = 100 Amp

POWER WIRE



1/0GA

SHW10B (50Ft/15.2m Roll): Blue SHW10G (50Ft/15.2mRoll): Gray SHW10C (50Ft/15.2m Roll): Clear SPW10TR (50Ft/15.2m Roll): Matte Red SPW10TB (50Ft/15.2m Roll): Matte Black

4GA

SHW14B20 (20Ft/6.1m Blister): Blue SHW14C7 (7Ft/2.1m Blister): Clear SHW14B (100Ft/30.5m Roll): Blue SHW14G (100Ft/30.5m Roll): Gray SHW14C (100Ft/30.5m Roll): Clear SPW14TR (100Ft/30.5m Roll): Matte Red SPW14TB (100Ft/30.5m Roll): Matte Black SPW14TR250 (250Ft/76.2m Roll): Matte Black

8GA

SHW18B20 (20Ft/6.1m Blister): Blue SHW18C7 (7Ft/2.1m Blister): Clear SHW18B (250Ft/76.2m Roll): Blue SHW18G (250Ft/76.2m Roll): Gray SHW18C (250Ft/76.2m Roll): Clear SPW18TR (250Ft/76.2m Roll): Matte Red SPW18TR500 (500Ft/152.4m Roll): Matte Red SPW18TB500 (500Ft/152.4m Roll): Matte Black

10GA

SPW110TR (250Ft/76.2m Roll): Matte Red **SPW110TR500** (500Ft/152.4m. Roll): Matte Red **SPW110TB** (250Ft/76.2m Roll): Matte Black **SPW110TB500** (500Ft/152.4m. Roll): Matte Black

SPEAKER WIRE

10 GA SHW510G (50 Ft Roll): Gray

12 GA

SPW512BK(250Ft/76.2m Roll): Black SPW512B (100Ft/30.5m Roll): Blue SPW512B250 (250Ft/76.2m Roll): Blue SHW512G (100Ft/30.5m Roll): Gray SHW512G250 (250Ft/76.2m Roll):Gray

14GA

SHW514B15 (15Ft/4.6m Blister): Blue **SPW514BK** (500Ft/152.4m Roll): Black

16 GA

SHW516B50 (50Ft/15.2m Blister): Blue SHW516B (250Ft/76.2m Roll): Blue

16 GA Cont'd

SHW516B500 (500Ft/152.4m Roll): Blue SHW516G (250Ft/76.2m Roll):Gray SHW516G500 (500Ft/152.4m Roll): Gray SPW516GY (500Ft/152.4m Roll): Gray SPW516BK (500Ft/152.4m Roll): Black SPW516KH (500Ft/152.4m Roll): White SPW516RB (1000Ft/304.8m Roll): Red / Black SPW516C500 (500Ft/152.4m Roll): Clear SPW516C (1000Ft/304.8m Roll): Clear

18 GA

SPW518BK1 (1000Ft/304.8m Roll): Black SPW518C(1000Ft/304.8m Roll): Clear

20 GA

SPW520RB (500Ft/152.4m Roll): Red/Black

ISBT23 (iSimple) WEATHER-RESISTANT BLUETOOTH RECEIVER

- Coated PCB boards for added protection
- Fully sealed housing for weather proofing
- Small enough to be installed in limited space
- ▶ 4V RCA output for better sound power
- ► Easy two wire installation
- ▶ FCC, Bluetooth and CE certification
- Bluetooth audio receiver to transmit music from a phone to any car, boat, or motorcycle with an AUX input or direct to amplifier



PCAM-150 (EchoMaster) LIP-MOUNT BLIND SPOT CAMERA

Key Features:

- Sensor Type: 1/4" CMOS
- Min. illumination (LUX): 0.1
- Viewing Angle: 170°
- ► Water/debris-proof Rating: IP67
- Image (Mirrored/Non-mirrored): Selectable
- Parking Lines: Selectable





TRANSFORM YOUR STORE'S INTERIOR

With Stinger, you not only get the products to enhance your audio builds, you also get merchandising options that reinforce your store's value proposition, and assist you with sell-through. Our modular planograms are built for any store, large and small.

WIRE AND BATTERY DISPLAYS



SGM4 3-Tier Battery Rack





SGM2N Standing Wire Rack with Locking Wheels 52" H x 24" W x 21" D

STINGER STORE TAKEOVER





SGM9 Tabletop or Slatwall Interactive Display 17" x 17"



ROBUKIII RoadKill RoadKill ELIMINATES NOISE RoadKill Roadkiil DO 0 1.2 SGM8N Floor Standing Display POWER SERIES BATTERIES THE HEART OF YOUR SYSTEM

SGM4 3-Tier Battery Rack

STINGER STORE TAKEOVER

Easily migrate all of your audio accessories to Stinger, or give your store a total makeover with our large turn-key, bundle pack.

QUANTITY	PART #	DESCRIPTION
1	SK6201	1/0GA 6000 Series Power Wire Kit
2	SK6641	4GA 6000 Series Power Wire Kit
2	SK6681	8GA 6000 Series Complete Kit
1	SK4201	1/0GA 4000 Series Power Wire Kit
2	SK4641	4GA 4000 Complete Wire Kit
2	SK4681	8GA 4000 Complete Wire Kit
2	SI1220	20Ft 1000 Series 2CH Coaxial RCA
2	SI1217	17Ft 1000 Series 2CH Coaxial RCA
2	SI1215	15Ft 1000 Series 2CH Coaxial RCA
2	SI1212	12Ft 1000 Series 2CH Coaxial RCA
2	SI129	9Ft 1000 Series 2CH Coaxial RCA
2	SI126	6Ft 1000 Seroes 2CH Coaxial RCA
2	SI123	3Ft 1000 Series 2CH Coaxial RCA
2	SI121.5	1.5Ft 1000 Series 2CH Coaxial RCA
2	SI12YF	1000 Series 1M, 2F Y-Adapter
2	SI12YM	1000 Series 1F, 2M Y-Adapter
4	SGM400	25 PK Stinger Re-Order Cards
2	SI4220	20Ft 4000 Series 2CH Twisted Pair RCA
2	SI4217	17Ft 4000 Series 2CH Twisted Pair RCA
2	SI4417	17Ft 4000 Series 4CH Twisted Pair RCA
2	SI4617	17Ft 4000 Series 6CH Twisted Pair RCA
2	SI4215	15Ft 4000 Series 2CH Twisted Pair RCA
2	SI4212	12Ft 4000 Series 2CH Twisted Pair RCA
2	SI426	6Ft 4000 Series 2CH Twisted Pair RCA
2	SI423	3Ft 4000 Series 2CH Twisted Pair RCA
2	SI42YF	4000 Series 1M, 2F Y-Adapter
2	SI42YM	4000 Series 1F, 2M Y-Adapter
2	SI8220	20Ft 8000 Series 2CH Twisted Pair RCA
2	SI8217	17Ft 8000 Series 2CH Twisted Pair RCA
2	SI8417	17Ft 8000 Series 4CH Twisted Pair RCA
2	SI8212	12Ft 8000 Series 2CH Twisted Pair RCA
2	SI826	6Ft 8000 Series 2CH Twisted Pair RCA
2	SI823	3Ft 8000 Series 2CH Twisted Pair RCA
2	SI82YF	8000 Series 1M, 2F Y-Adapter
2	SI82YM	8000 Series 1F, 2M Y-Adapter
4	SGM1N	Slatwall wire Rack
4	SGM1ST	Wire Rack Sign
1	SGM4	Floor Standing Battery Rack
2	SPD5203	0 / 4GA ANL Fuseholder
2	SPD5210	ANL Fuseholder 5/16th Ring
2	SHD801	MIDI Inline Fuseholder
2	SHD820	2 Pos. 0/4GA In, 4/8GA Out MIDI Distro Block
2	SHD821	4 Pos. 0/4GA In, 4/8GA Out HPM Distro Block
2	SPD5101	4/8GA In/Out AGU Fuseholder
2	SPD5120	4Ga In / 8Ga Out AGU
2	SPF52100	100 Amp ANL Fuse
2	SPF52150	150 Amp ANL Fuse
2	SPF52200	200 Amp ANL Fuse
2	SPF52250	250 Amp ANL Fuse
2	SPF52300	300 Amp ANL Fuse
2	SPF5850	3 PK 50 Amp MIDI Fuse
2	SPF5860	3 PK 60 Amp MIDI Fuse

QUANTITY	PART #	DESCRIPTION
2	SPF58100	3 PK 100 Amp MIDI Fuse
2	SPF58125	3 PK 125 Amp MIDI Fuse
2	SPF58150	3 PK 150 Amp MIDI Fuse
2	SPF5180	5 PK 80 Amp AGU Fuse
2	SPF5160	5 PK 60 Amp AGU Fuse
2	SPF5140	5 PK 40 Amp AGU Fuse
2	SPF5130	5 PK 30 Amp AGU Fuse
2	SHD21	4 Pos Distribution Block OGA in 4GA Out
2	SHD20	2 Pos Distribution Block OGA in 4GA Out
2	SPD570	Power Ground Distribution Block
2	SPD511	(3) 4GA Input/Output T-Block
2	SPD512	(3) 0GA Input/Output T-Block
2	SPD515	(1) 1GA Input / (3) 4GA Output Distribution
2	SPT5308	Short GM Battery Terminals
2	SPT55309	Long GM Battery Adapter
2	SPT53102	(1)1GA, (1)4GA, (2)8GA + Battery Term.
2	SPT53302	(1)1GA, (1)4GA, (2)8GA - Battery Term.
2	SP155502 SP153301	(1)Ring Terminal, (1)8GA, (1)4GA Battery Term
2	SPT53501	(1)8GA, (2)4GA +/- Battery Term
2	SPI521	0-4GA Gauge Reducer
2	SPT522	4-8GA Gauge Reducer
2	SPT520	0GA Ring Terminal
2	SPT524	4GA Ring Terminal
2	SPT5210	0GA Wire Coupler
2	SPT5211	4GA Wire Coupler
2	SPT5101	0GA Power Ring Terminal
2	SPT5104	4GA Crimp Ring Terminal
2	SPT5108	8GA Power Ring Terminal
2	SPT5124	4GA Barrier Space #10
2	SPT5118	8GA Barrier Space #8
2	SPTE5131	0GA Expert Ground Earl Terminal
2	SPTE5134	4GA Expert Ground Earl Terminal
2	SPTE5138	8GA Expert Ground Earl Terminal
1	SGP901501	150 Amp Circit Breaker
1	SPG90200	200 Amp Circit Breaker
2	SVMB	Blue Digital Voltage Meter
2	SVMR	Red 3 Digit Voltage Meter
1	SGP38	80 Amp Relay & Battery Isolator
1	SGP32	200 Amp Relay & Battery Isolator
2	RKX36B	RoadKill Expert Bulk Pack
1	RKST36B	RoadKill Stealth Bulk Pack
6	RKX4	Expert RoadKill Universal
12	RXKSK	Expert RoadKill Speaker Kit
4	RKXDK	Expert RoadKill Door Kit
4	RKXTK	Expert RoadKill Trunk Kit
6	RKXLIC	RoadKill License Plate Kit
4	RKINSTALL	Sound Damping Application + Cutting Tool
1	RKU36	RoadKill Ultimate Bulk Pack
2	RK012	Overkill Foam Damping Mat
1	RKXHL	RoadKill Hood LIner Kit
4	RKFR6	Fast Rings
1	SGM8N	RoadkKill Floor Display
1	SGM117	Slatwall Header
1	SGM118	Slatwall Header

ROADKILL SOUND DAMPING



SLATWALL PLANOGRAM PRODUCT

QTY	PART #	DESCRIPTION
2	RKX36B	RoadKill Expert Bulk Pack
6	RKX4	Expert RoadKill Universal
4	RXKSK	Expert RoadKill Speaker Kit
2	RKXDK	Expert RoadKill Door Kit
2	RKXTK	Expert RoadKill Trunk Kit
2	RKXLIC	RoadKill LIcense Plate Kit
2	RKINSTALL	Sound Damping Application + Cutting Tool
1	RK012	Overkill Foam Damping Mat
4	RKFR6	Fast Rings
1	SGM9	RoadKill Damping Display
1	SGM1044	Slatwall Header
1	RKU8	Roadkill Ultimate Bulk Pack
1	SGM400	Re-Order Cards

FLOOR DISPLAY PRODUCT

QTY	PART #	DESCRIPTION
2	RKX36B	RoadKill Expert Bulk Pack
1	RKST36B	RoadKill Stealth Bulk Pack
6	RKX4	Expert RoadKill Universal
12	RXKSK	Expert RoadKill Speaker Kit
4	RKXDK	Expert RoadKill Door Kit
4	RKXTK	Expert RoadKill Trunk Kit
6	RKXLIC	RoadKill License Plate Kit
4	RKINSTALL	Sound Damping Application + Cutting Tool
1	RKU36	RoadKill Ultimate Bulk Pack
2	RK012	Overkill Foam Damping Mat
1	RKXHL	RoadKill Hood Liner Kit
4	RKFR6	Fast Rings
1	SGM400	Re-Order Cards



SGM104N Slatwall Header



Tabletop or Slatwall Interactive Display 17" x 17"



SGMRK Tabletop or Slatwall Material Display 14" x 14"



SGM8N Floor Standing Display

MODULAR INTERCONNECTS + WIRING KIT PLANOGRAM

Purchase as a complete planogram, or purchase the Series sections alone to build a customized planogram.



	QUANTITY	PART #	DESCRIPTION
	2	SI921.5	1.5Ft 9000 Premium Interconnect
	2	SI9220	20Ft 9000 Series Premium Interconnect
	2	SI9217	17Ft 9000 Series Premium Interconnect
9000 Series RCA	2	SI8417	17Ft 9000 Series Premium Interconnect
Bundle	2	SI9212	12Ft 9000 Series Premium Interconnect
	2	SI926	6Ft 9000 Series Premium Interconnect
	2	SI923	3Ft 9000 Series Premium Interconnect
	2	SI92YF	9000 Series 1M, 2F Y-Adapter
	2	SI92YM	9000 Series 1F, 2M Y-Adapter
	1	sI92DISPLAY	9000 Series Counter/Slat Display

	QUANTITY	PART #	DESCRIPTION
	1	SK6201	1/0GA 6000 Series Power Wire Kit
	2	SK6641	4GA 6000 Series Power Wire Kit
6000 Series Kit Bundle	2	SK6681	8GA 6000 Series Complete Kit
	1	SGM117	Slatwall Header
	1	SK4201	1/0GA 4000 Series Power Wire Kit
4000 Series	2	SK4641	4GA 4000 Complete Wire Kit
Kit Bundle	2	SK4681	8GA 4000 Complete Wire Kit
	1	SGM117	Slatwall Header
	2	SI1220	20Ft 1000 Series 2CH Coaxial RCA
	2	SI1217	17Ft 1000 Series 2CH Coaxial RCA
	2	SI1215	15Ft 1000 Series 2CH Coaxial RCA
1000 Series	2	SI1212	12Ft 1000 Series 2CH Coaxial RCA
RCA	2	SI129	9Ft 1000 Series 2CH Coaxial RCA
Bundle	2	SI126	6Ft 1000 Seroes 2CH Coaxial RCA
	2	SI123	3Ft 1000 Series 2CH Coaxial RCA
	2	SI121.5	1.5Ft 1000 Series 2CH Coaxial RCA
	2	SI12YF	1000 Series 1M, 2F Y-Adapter
	2	SI12YM	1000 Series 1F, 2M Y-Adapter
	1	SGM400	25 PK Stinger Re-Order Cards
	1	SGM117	Slatwall Header
	2	SI4220	20Ft 4000 Series 2CH Twisted Pair RCA
	2	SI4217	17Ft 4000 Series 2CH Twisted Pair RCA
	2	SI4417	17Ft 4000 Series 4CH Twisted Pair RCA
	2	SI4617	17Ft 4000 Series 6CH Twisted Pair RCA
4000 Series	2	SI4215	15Ft 4000 Series 2CH Twisted Pair RCA
RCA Bundle	2	SI4212	12Ft 4000 Series 2CH Twisted Pair RCA
	2	SI426	6Ft 4000 Series 2CH Twisted Pair RCA
	2	SI423	3Ft 4000 Series 2CH Twisted Pair RCA
	2	SI42YF	4000 Series 1M, 2F Y-Adapter
	2	SI42YM	4000 Series 1F, 2M Y-Adapter
	1	SGM400	25 PK Stinger Re-Order Cards
	1	SGM117	Slatwall Header
	2	SI6220	20Ft 6000 Series 2CH Twisted Pair RCA
	2	SI6217	17Ft 6000 Series 2CH Twisted Pair RCA
(000 Contor	2	SI6212	12Ft 6000 Series 2CH Twisted Pair RCA
6000 Series RCA	2	\$I623	3Ft 6000 Series 2CH Twisted Pair RCA
Bundle	2	SI627F	6000 Series 1M, 2F Y-Adapter
	2	SI62YM	6000 Series 1F, 2M Y-Adapter
	1	SGM400	25 PK Stinger Re-Order Cards
	1	SGM117	Slatwall Header
	2	SI8220	20Ft 8000 Series 2CH Twisted Pair RCA
	2	SI8217	17Ft 8000 Series 2CH Twisted Pair RCA
	2	SI8417	17Ft 8000 Series 4CH Twisted Pair RCA
0000 0	2	SI8212	12Ft 8000 Series 2CH Twisted Pair RCA
8000 Series RCA	2	SI826	6Ft 8000 Series 2CH Twisted Pair RCA
Bundle	2	SI823	3Ft 8000 Series 2CH Twisted Pair RCA
	2	SI82YF	8000 Series 1M, 2F Y-Adapter
	2	SI82YM	8000 Series 1F, 2M Y-Adapter
	1	SGM400	25 PK Stinger Re-Order Cards
	1	SGM117	Slatwall Header



A Power Brand of AAMP Global Global HQ: 15500 Lightwave, Clearwater, FL 33760 In the US: 1-800-477-2267 | support@aampglobal.com Outside of the US: technical.eu@aampglobal.com

> StingerElectronics.com Facebook.com/StingerElectronics