




## Installation Manual Double DIN Kit

Standard: 381190-22

Rubber-Touch: 391190-22

### • Mercedes M-Class (W164) 2005 →

Compatible with double DIN devices

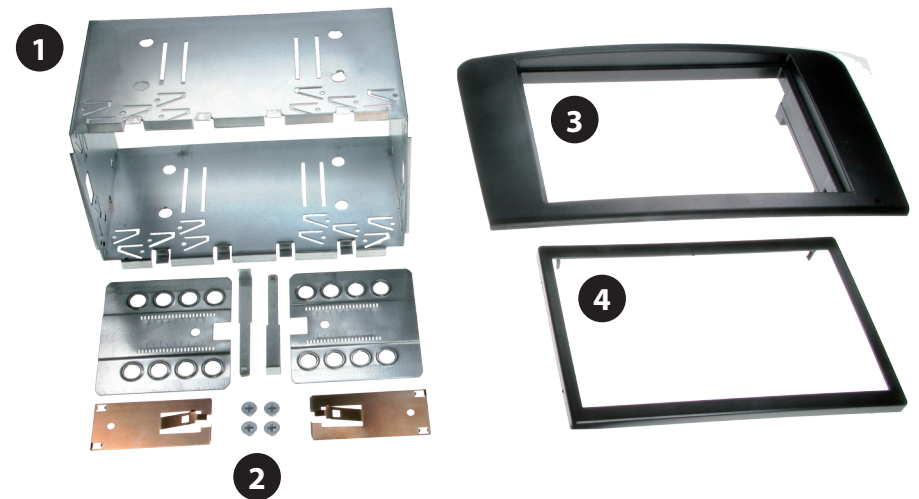

#### Double DIN Set contents

- (1) Metal Frame
- (2) Installation Kit
- (3) Facia Plate
- (4) Trim Frame

## Installation Manual: 381190-22 / 391190-22



1. Open the ash tray.


Release latches of the air condition control unit below the panel (see photo) on each side by pushing it upward.

Remove air condition control unit.



2. Remove the two Torx screws below the OEM head unit.

Remove the OEM head unit.




3. Place the fascia plate on the dashboard. Fix it with the 2 original screws.

Push the Metal Frame into the fascia plate.

Connect all required circuit points and push the double DIN head unit in the metal frame until it snaps in.


Place the trim frame.

Reinstall everything in reverse order to finish installation.

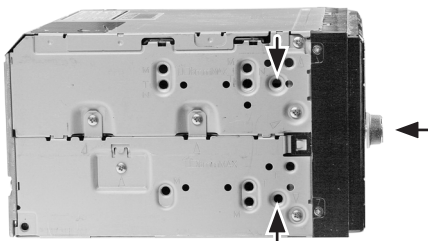

(sample photo)

Mount the metal brackets to the double DIN head unit.

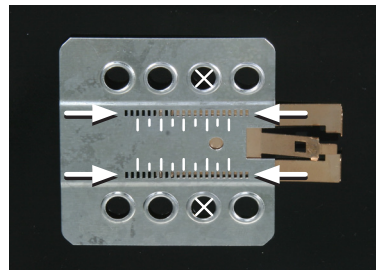

(sample photo)

*The position of the copper coloured holder can be adjusted to your needs for perfect fit. (see sample)*

*All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*